


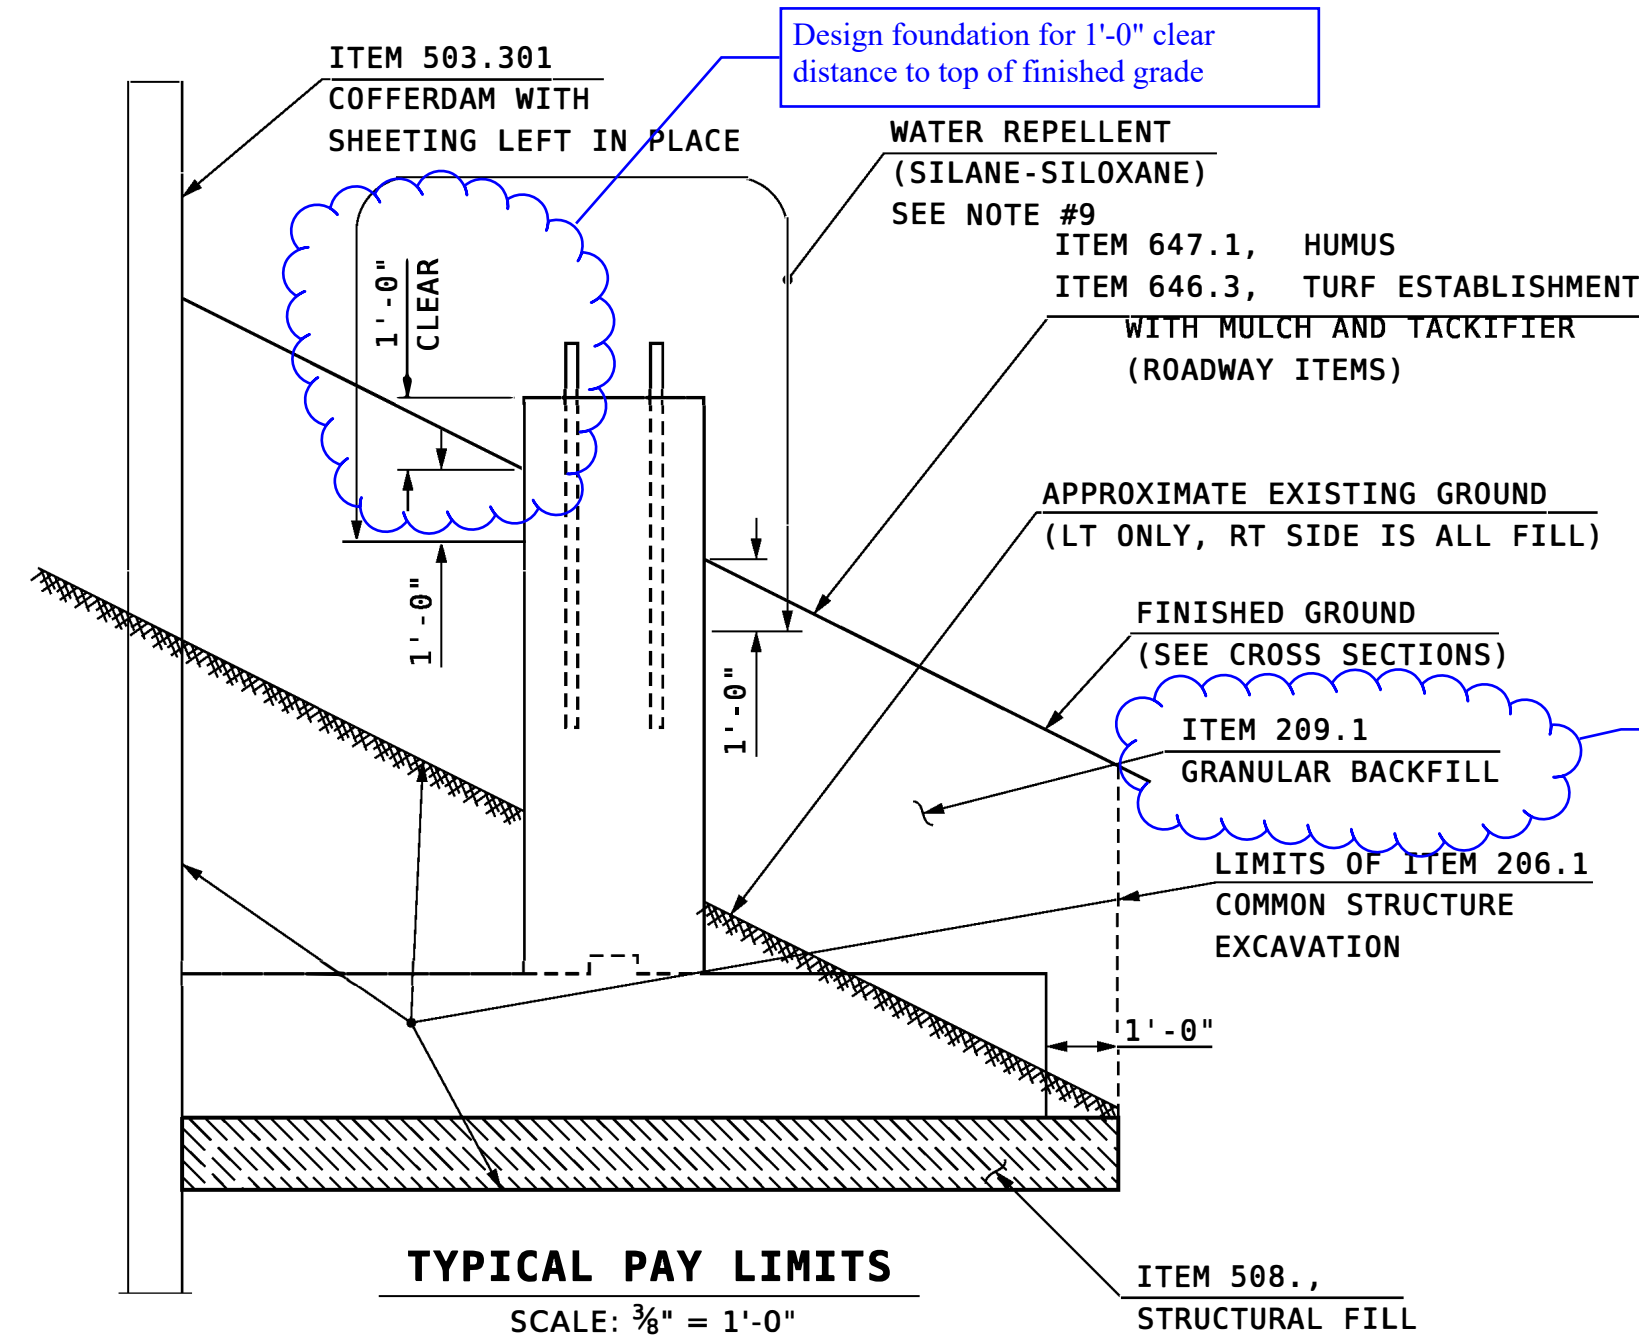

SIGN FOOTING NOTES


- FOR THE INSTALLATION AND PRETENSIONING OF ANCHOR RODS, SEE SPECIAL PROVISION AMENDMENT TO SECTION 615, TRAFFIC SIGNS.
- THERE ARE 2 FOOTINGS OF THIS CONFIGURATION REQUIRED AND THE QUANTITIES GIVEN ARE TOTALED FOR BOTH FOOTINGS.
- ALL REINFORCING STEEL SHALL HAVE 3" MINIMUM CLEAR COVER FROM CONCRETE SURFACES.
- FOOTINGS SHALL BE BACKFILLED TO FINAL GROUND BEFORE THE SIGN SUPPORT STRUCTURE IS INSTALLED.
- FINAL GROUND ELEVATIONS SHALL BE TAKEN FROM THE ROADWAY CROSS SECTIONS. IF ACTUAL FINAL ELEVATIONS DIFFER BY MORE THAN 1'-0", THEN A COMPLETE REDESIGN OF THE SIGN FOOTING WILL BE REQUIRED.
- THE LEFT FOOTING DESIGN SIGN AREA IS 442.4 SF. THE RIGHT FOOTING DESIGN SIGN AREA IS 504.0 SF. BOTH DESIGN SIGN AREAS INCLUDED A 30% INCREASE.
- STAINLESS STEEL STD. GR. WIRE CLOTH, 1/4" MAX. OPENING WITH MIN. WIRE DIA. OF AWG NO. 16 WITH 2" LAP. SECURE WITH 3/4" STAINLESS STEEL BANDING AFTER ANCHOR RODS ARE FULLY TIGHTENED AND TESTED. (SUBSIDIARY TO ITEM 615.XX)
- FOOTING SUPPORTED ON STRUCTURAL FILL ON UNDISTURBED SOIL WITH A NOMINAL BEARING CAPACITY OF 15.1 KSF IN COMBINATION WITH A RESISTANCE FACTOR OF 0.45 (STRENGTH). SEE THE GEOTECHNICAL REPORT FOR FURTHER INFORMATION.
- WATER REPELLENT (SILANE-SILOXANE) SHALL BE APPLIED TO ALL EXPOSED CONCRETE SURFACES TO 1'-0" BELOW FILL LINES IN ACCORDANCE WITH SECTION 534. ALL COSTS SUBSIDIARY TO ITEM 520.2.
- NO GROUT SHALL BE PLACED BETWEEN THE FOUNDATION AND BOTTOM OF THE BASE PLATE.

SIGN FOOTING REINFORCING SCHEDULE


MARK	SIZE	NO.	UNBENT LENGTH	TYPE
C1	#7	48	23'-6"	STRAIGHT
C2	#7	96	11'-6"	STRAIGHT
C3	#4	4	25'-6"	HOOP
C4	#4	4	23'-8"	HOOP
C5	#4	4	22'-2"	HOOP
C6	#4	4	20'-6"	HOOP
C7	#4	4	18'-8"	HOOP
C8	#4	4	17'-0"	HOOP
C9	#4	4	15'-4"	HOOP
C10	#7	40	9'-6"	STRAIGHT
C11	#4	8	2'-6"	STRAIGHT
C12	#4	8	3'-8"	STRAIGHT
C13	#4	8	4'-10"	STRAIGHT
C14	#4	8	6'-1"	STRAIGHT
C15	#4	8	7'-3"	STRAIGHT
C16	#4	8	8'-6"	STRAIGHT
C17	#9	16	20'-6"	BENT & CURVED

REINFORCING STEEL IN SCHEDULE IS FOR 2 SIGN FOOTINGS. TOTAL WEIGHT OF REINFORCING STEEL IN TABLE IS 7012 lb.

REINFORCING STEEL SHALL BE GRADE 60

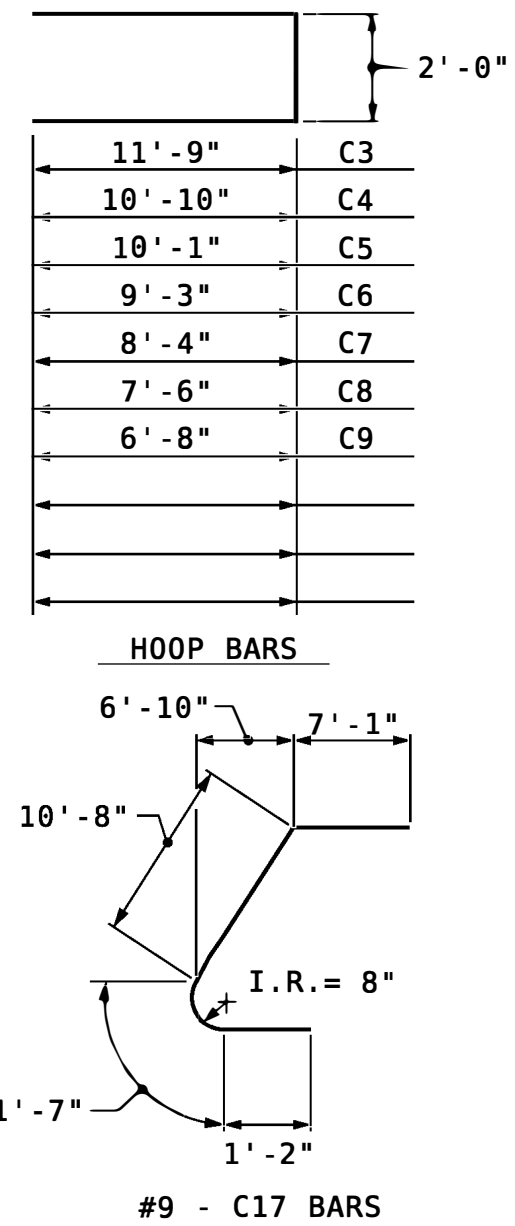

14 #4 HOOP BARS @ 1'-0"
C3(BOT) - C9(TOP), 2 EACH
(PLACED OUTSIDE VERTICAL BARS)

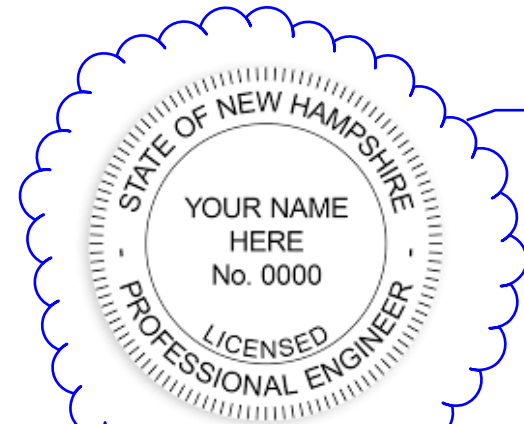

Note the inventory number of the structure/foundation obtained from Bureau of Traffic


SAMPLE PLAN

DATE: 12/2024

INV #: 389-SPTPK-0015-NS20.9


SUBDIRECTORY .DGN LOCATOR SHEET SCALE
ROCHESTER/10620L 615.1000X AS NOTED

SIGN FOOTING MASONRY & REINFORCEMENT FOR ITEM NO. 615.10001

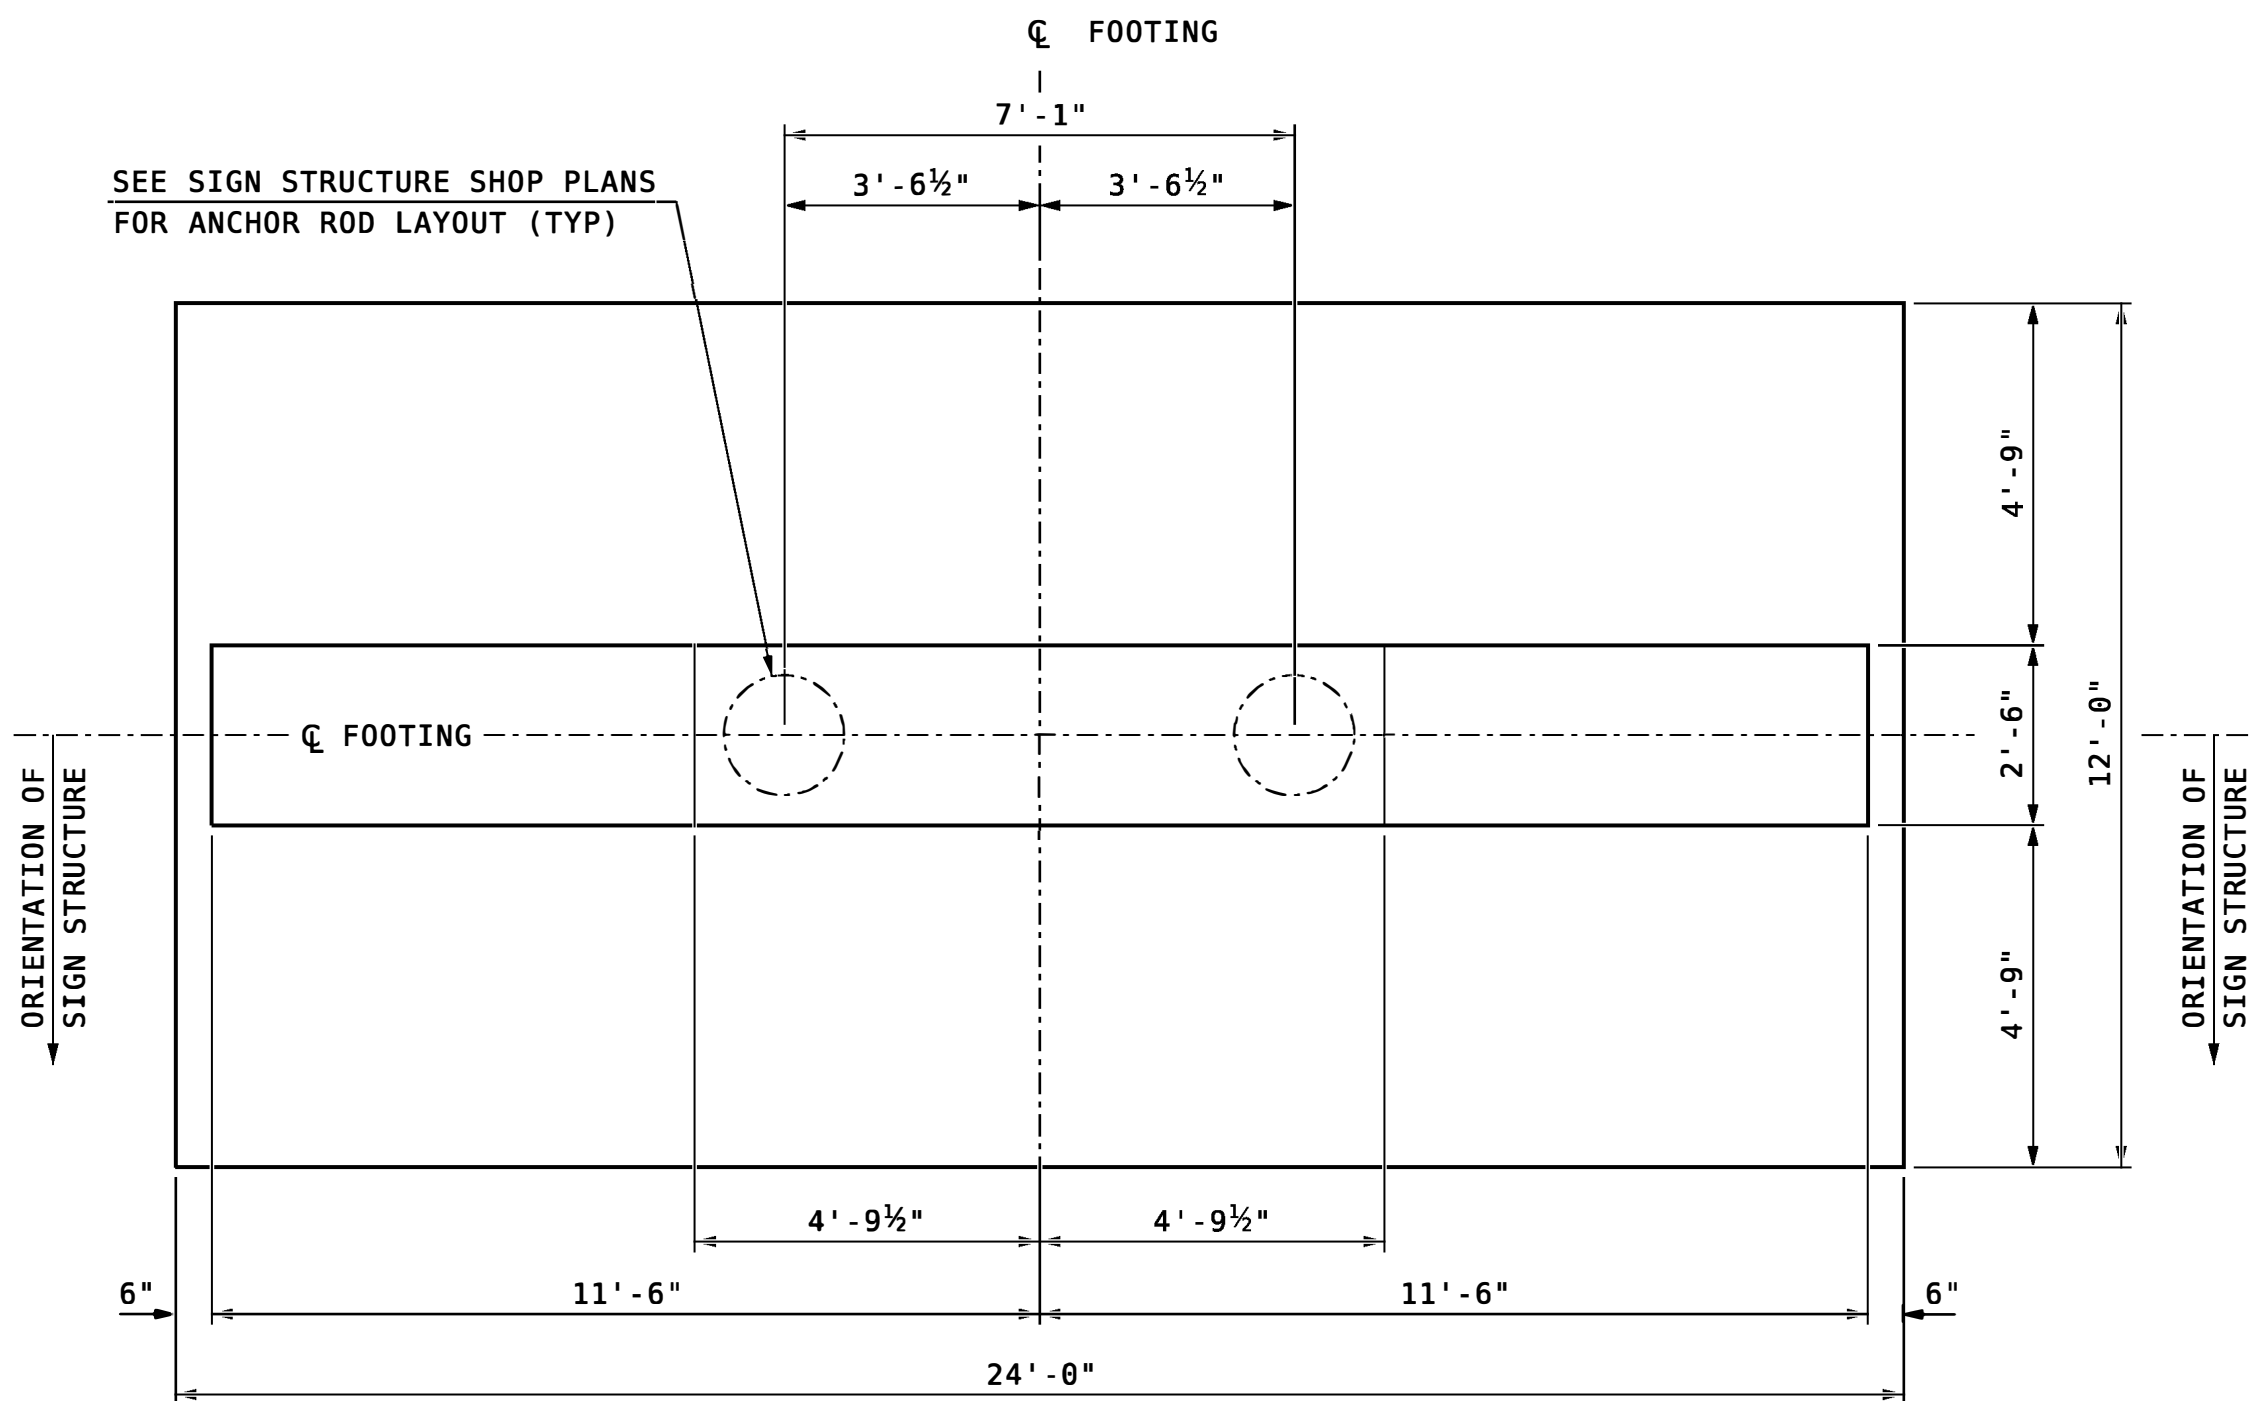

SIGN FOOTING MASONRY PLAN

SCALE: 3/8" = 1'-0"

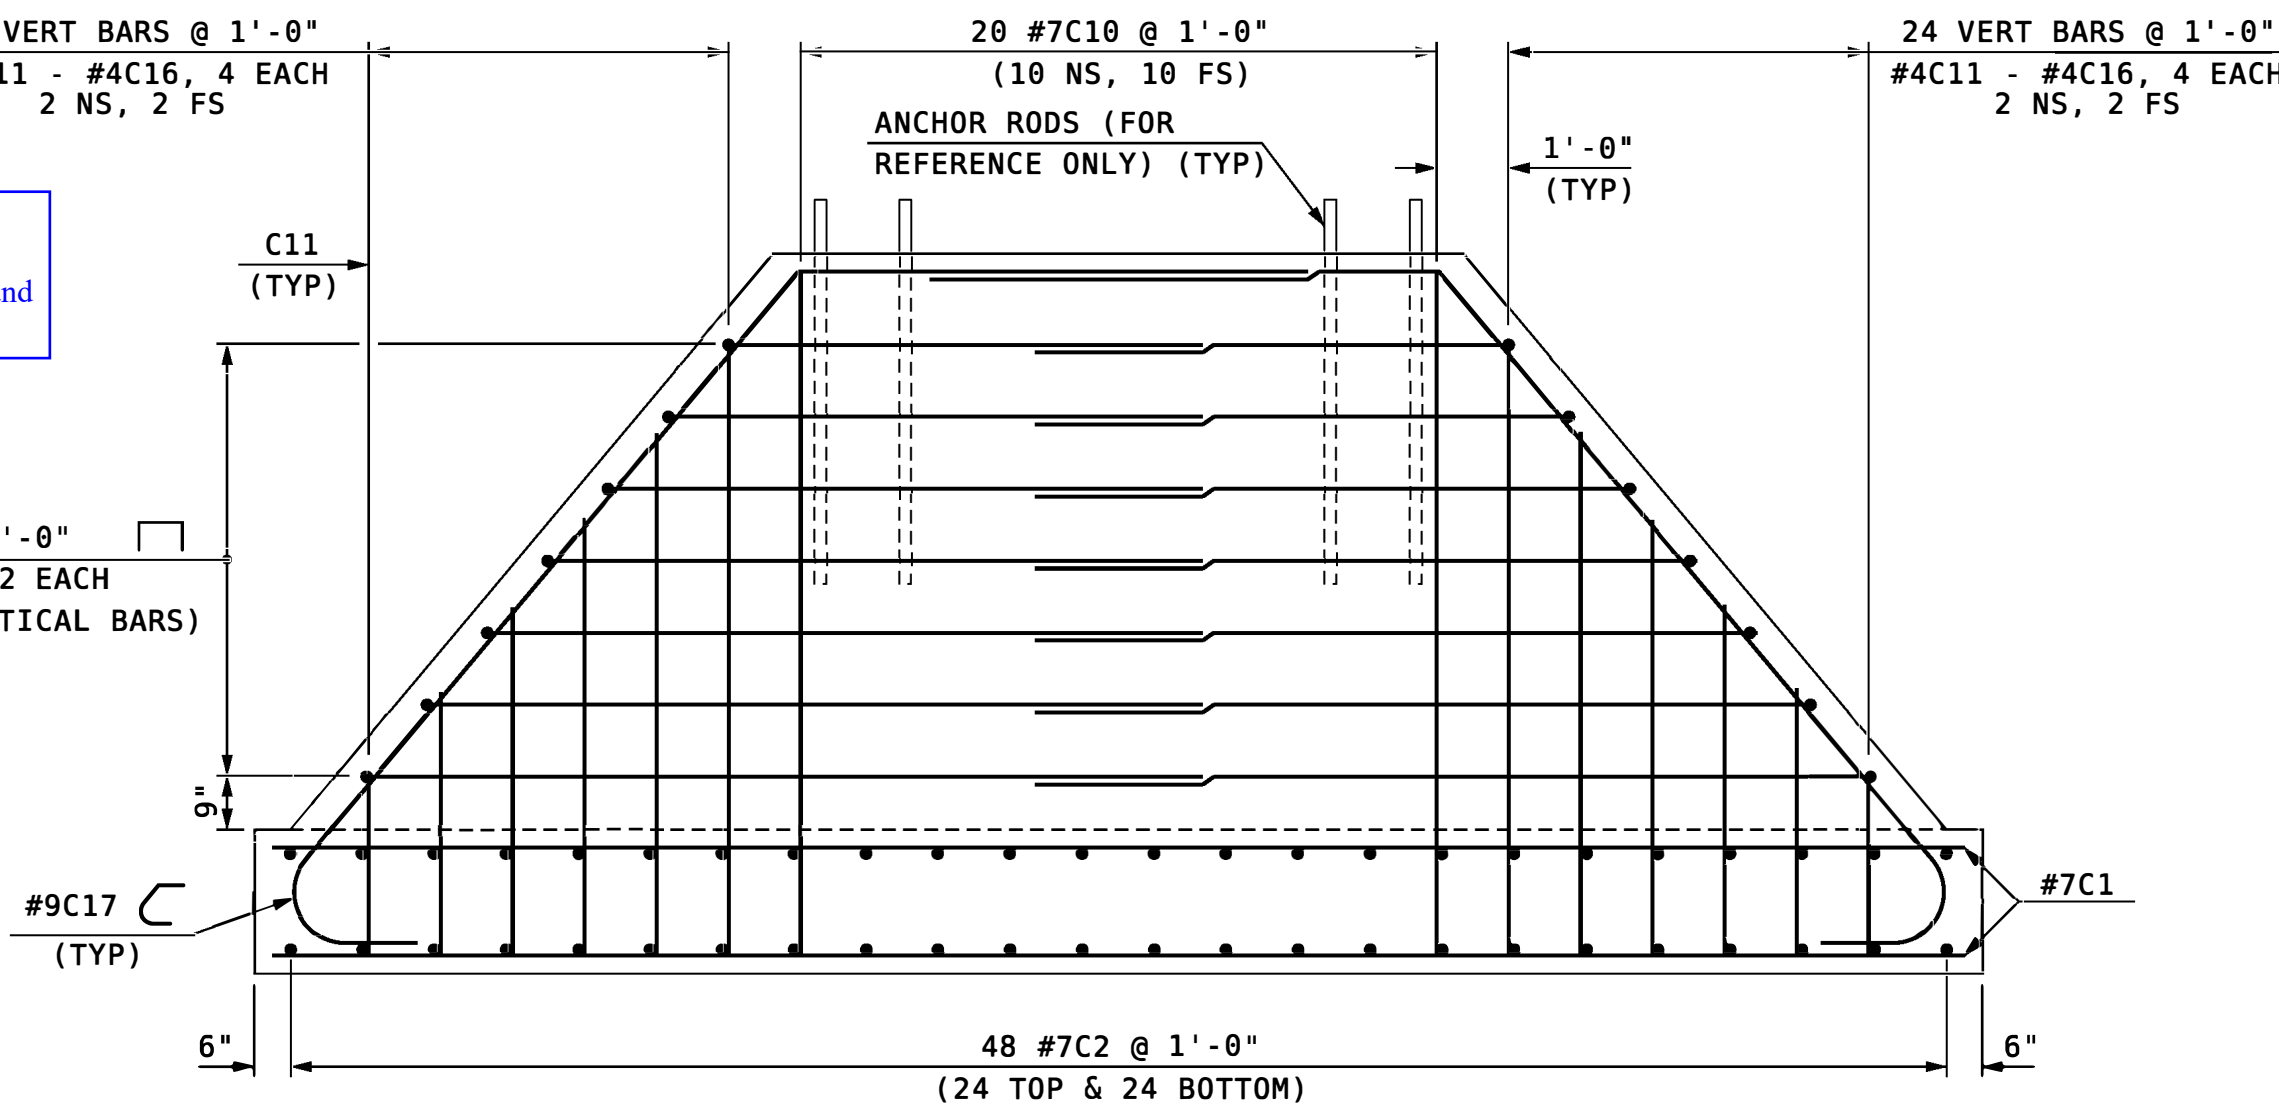

REINFORCING - SIDE ELEVATION


SCALE: 3/8" = 1'-0"

QUANTITY TABLE (2 FOOTINGS)			
ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT
206.1	COMMON STRUCTURE EXCAVATION	85	CY
209.1	GRANULAR BACKFILL	170	CY
503.301	COFFERDAMS WITH SHEETING	2	U
508	STRUCTURAL FILL	37	CY
520.2	CONCRETE CLASS B	66.8	CY
544.1	REINFORCING STEEL (ROADWAY)	7012	LB


Quantify Item 209.1 for all projects

SIGN FOOTING ELEVATION TABLE

STATION	OFFSET	ELEV "A"	ELEV "B"
172+00	LT 80	261	251
172+00	RT 80	258	248

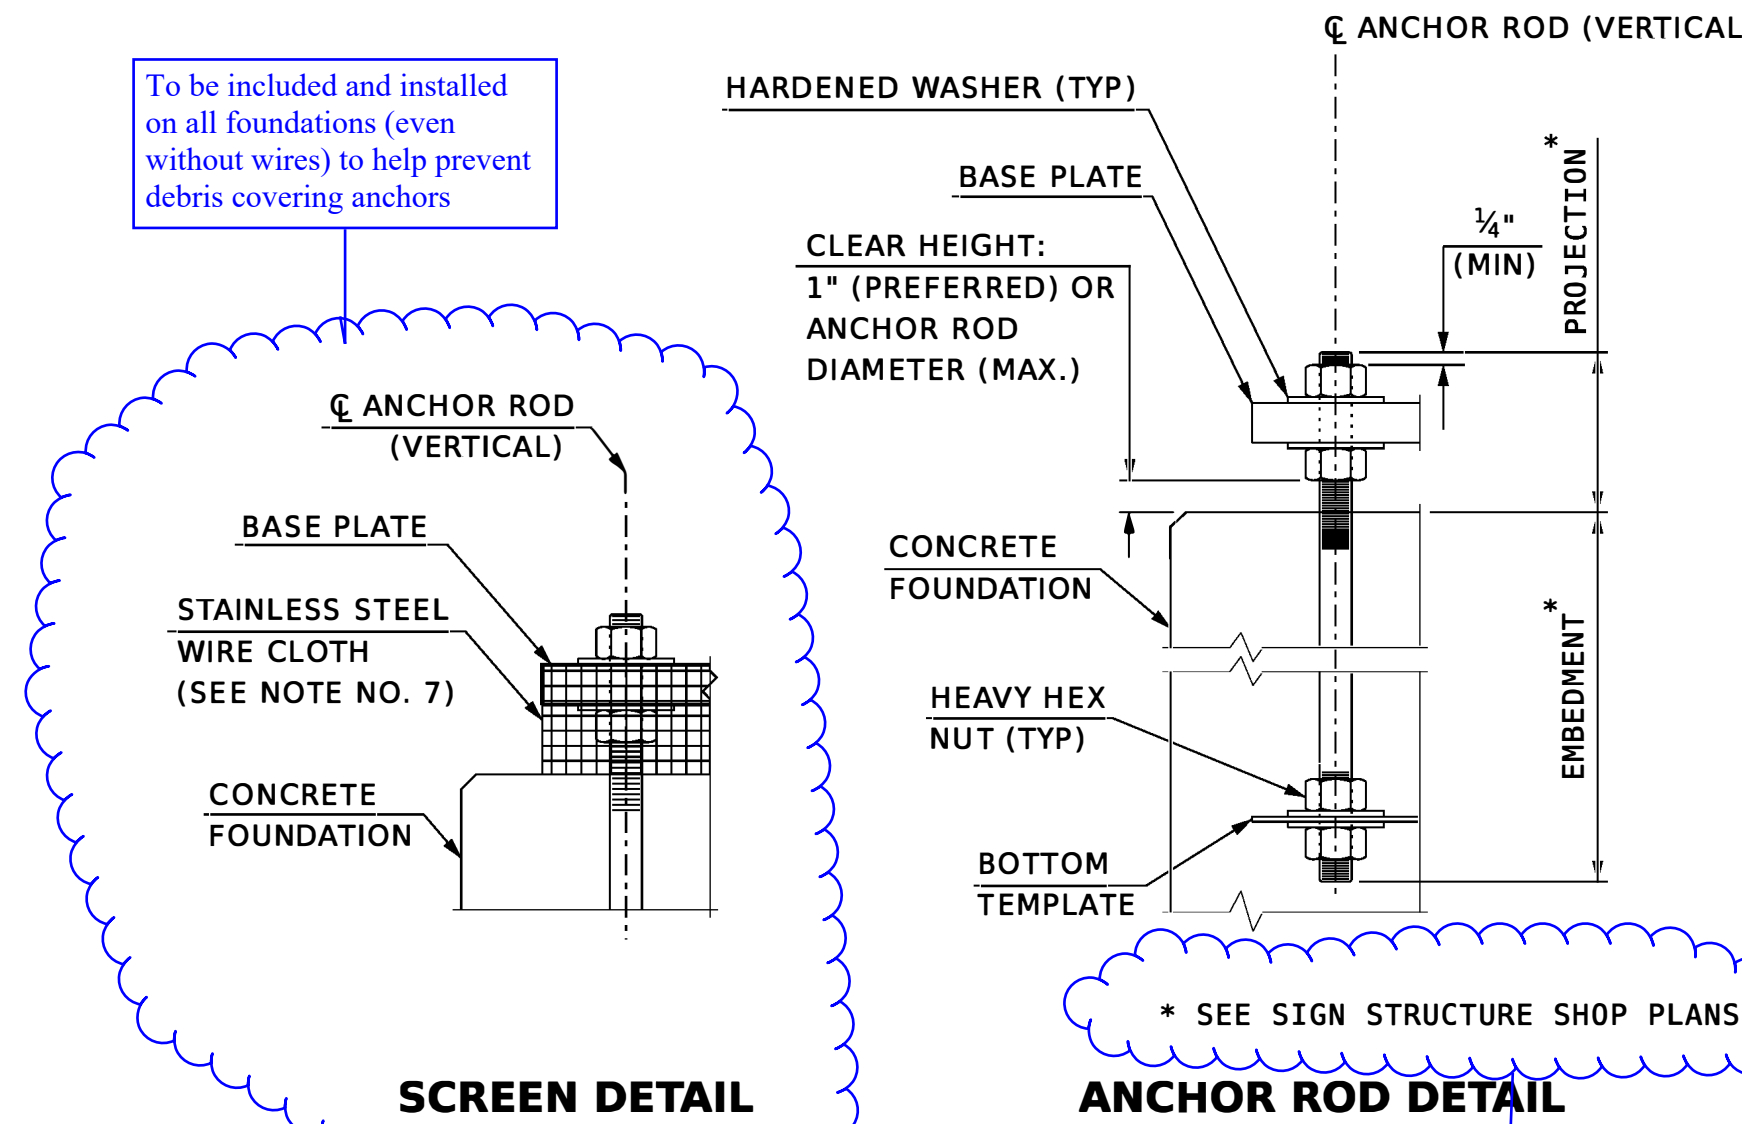


FOR REFERENCE ONLY. SEE SIGN STRUCTURE SHOP PLANS FOR ANCHOR ROD LAYOUT (TO BE SUPPLIED BY THE MANUFACTURER)

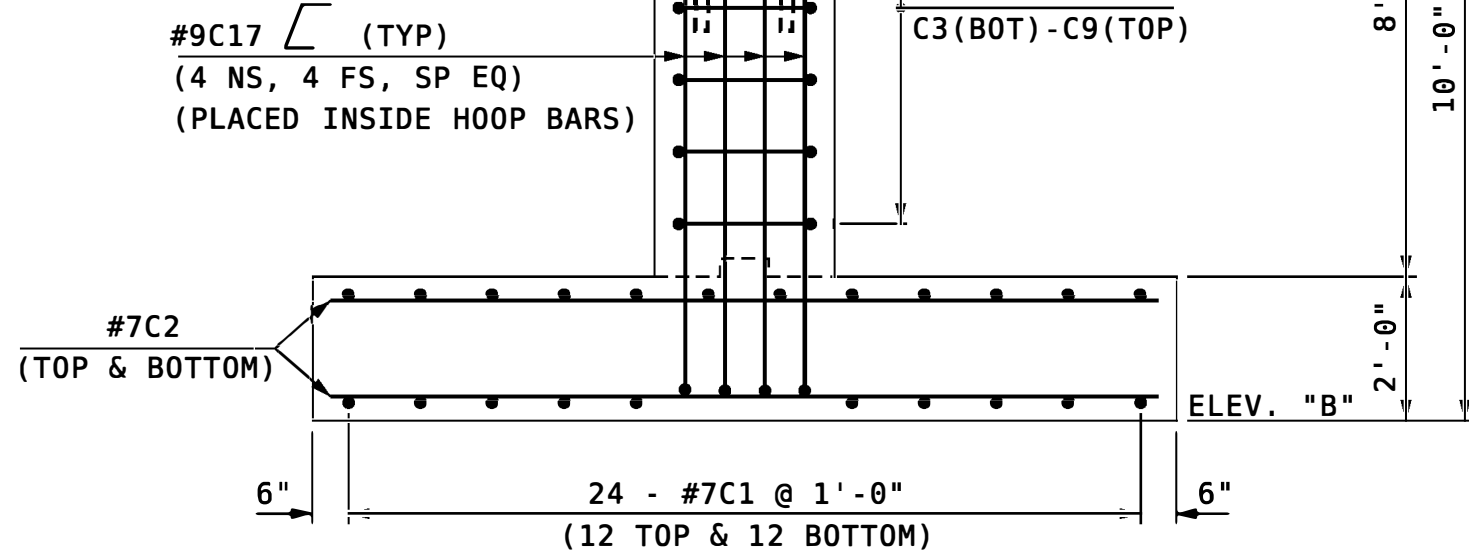

REINFORCING - END ELEVATION

SCALE: 3/8" = 1'-0"



STATE OF NEW HAMPSHIRE									
DEPARTMENT OF TRANSPORTATION * BUREAU OF BRIDGE DESIGN									
TOWN	ROCHESTER		BRIDGE NO.		N/A		STATE PROJECT		10620L
LOCATION NH ROUTE 16 - 400' SOUTH OF EXIT 15 NB OFF RAMP									
OVERHEAD SIGN STRUCTURE FOOTING									
REVISIONS AFTER PROPOSAL			BY		DATE		BY		DATE
			DESIGNED				CHECKED		
			DRAWN				CHECKED		
			QUANTITIES				CHECKED		
			ISSUE DATE				FEDERAL PROJECT NO.		SHEET NO.
			REV. DATE				-----		
BRIDGE SHEET OF FILE NUMBER TOTAL SHEETS									

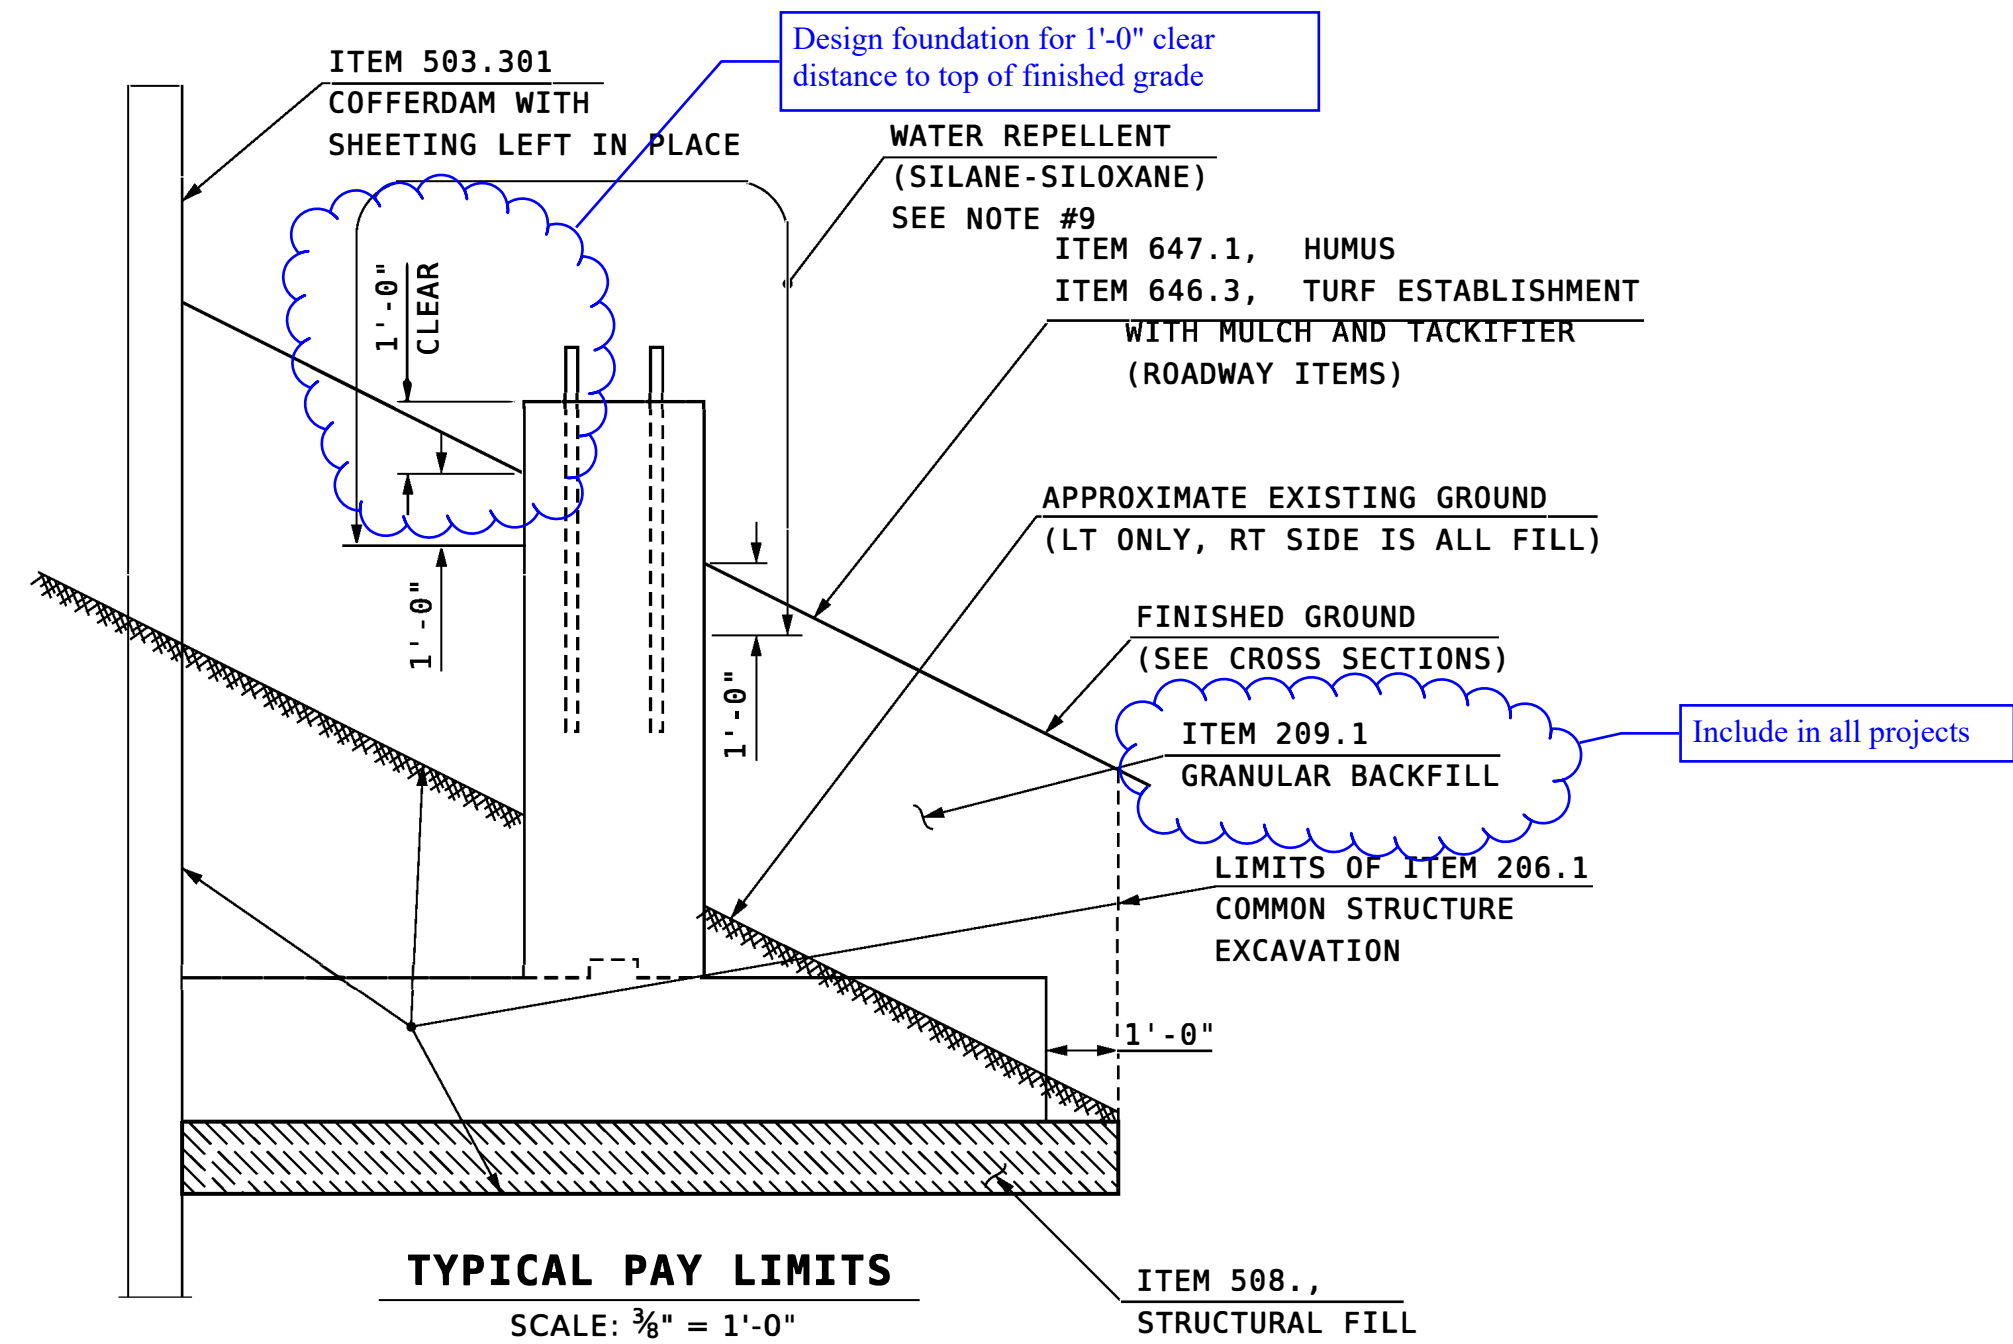


SIGN FOOTING NOTES

- FOR THE INSTALLATION AND PRETENSIONING OF ANCHOR RODS, SEE SPECIAL PROVISION AMENDMENT TO SECTION 615, TRAFFIC SIGNS.
- THERE ARE 2 FOOTINGS OF THIS CONFIGURATION REQUIRED AND THE QUANTITIES GIVEN ARE TOTALED FOR BOTH FOOTINGS.
- ALL REINFORCING STEEL SHALL HAVE 3" MINIMUM CLEAR COVER FROM CONCRETE SURFACES.
- FOOTINGS SHALL BE BACKFILLED TO FINAL GROUND BEFORE THE SIGN SUPPORT STRUCTURE IS INSTALLED.
- FINAL GROUND ELEVATIONS SHALL BE TAKEN FROM THE ROADWAY CROSS SECTIONS. IF ACTUAL FINAL ELEVATIONS DIFFER BY MORE THAN 1'-0", THEN A COMPLETE REDESIGN OF THE SIGN FOOTING WILL BE REQUIRED.
- THE LEFT FOOTING DESIGN SIGN AREA IS 442.4 SF. THE RIGHT FOOTING DESIGN SIGN AREA IS 504.0 SF. BOTH DESIGN SIGN AREAS INCLUDED A 30% INCREASE.
- STAINLESS STEEL STD. GR. WIRE CLOTH, 1/4" MAX. OPENING WITH MIN. WIRE DIA. OF AWG NO. 16 WITH 2" LAP. SECURE WITH 3/4" STAINLESS STEEL BANDING AFTER ANCHOR RODS ARE FULLY TIGHTENED AND TESTED. (SUBSIDIARY TO ITEM 615.XX)
- FOOTING SUPPORTED ON STRUCTURAL FILL ON UNDISTURBED SOIL WITH A NOMINAL BEARING CAPACITY OF 15.1 KSF IN COMBINATION WITH A RESISTANCE FACTOR OF 0.45 (STRENGTH). SEE THE GEOTECHNICAL REPORT FOR FURTHER INFORMATION.
- WATER REPELLENT (SILANE-SILOXANE) SHALL BE APPLIED TO ALL EXPOSED CONCRETE SURFACES TO 1'-0" BELOW FILL LINES IN ACCORDANCE WITH SECTION 534. ALL COSTS SUBSIDIARY TO ITEM 520.2.
- NO GROUT SHALL BE PLACED BETWEEN THE FOUNDATION AND BOTTOM OF THE BASE PLATE.

SIGN FOOTING REINFORCING SCHEDULE				
MARK	SIZE	NO.	UNBENT LENGTH	TYPE
C1	#7	48	23'-6"	STRAIGHT
C2	#7	96	11'-6"	STRAIGHT
C3	#4	4	25'-6"	HOOP
C4	#4	4	23'-8"	HOOP
C5	#4	4	22'-2"	HOOP
C6	#4	4	20'-6"	HOOP
C7	#4	4	18'-8"	HOOP
C8	#4	4	17'-0"	HOOP
C9	#4	4	15'-4"	HOOP
C10	#7	40	9'-6"	STRAIGHT
C11	#4	8	2'-6"	STRAIGHT
C12	#4	8	3'-8"	STRAIGHT
C13	#4	8	4'-10"	STRAIGHT
C14	#4	8	6'-1"	STRAIGHT
C15	#4	8	7'-3"	STRAIGHT
C16	#4	8	8'-6"	STRAIGHT
C17	#9	16	20'-6"	BENT & CURVED
REINFORCING STEEL IN SCHEDULE IS FOR 2 SIGN FOOTINGS. TOTAL WEIGHT OF REINFORCING STEEL IN TABLE IS 7012 lb.				
REINFORCING STEEL SHALL BE GRADE 60				

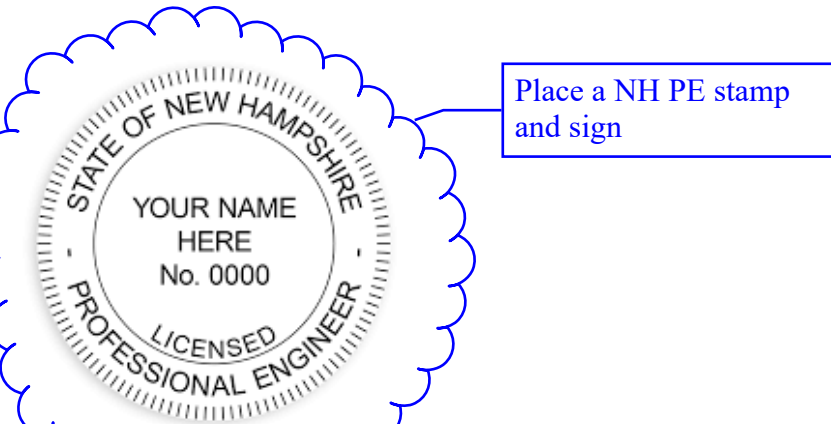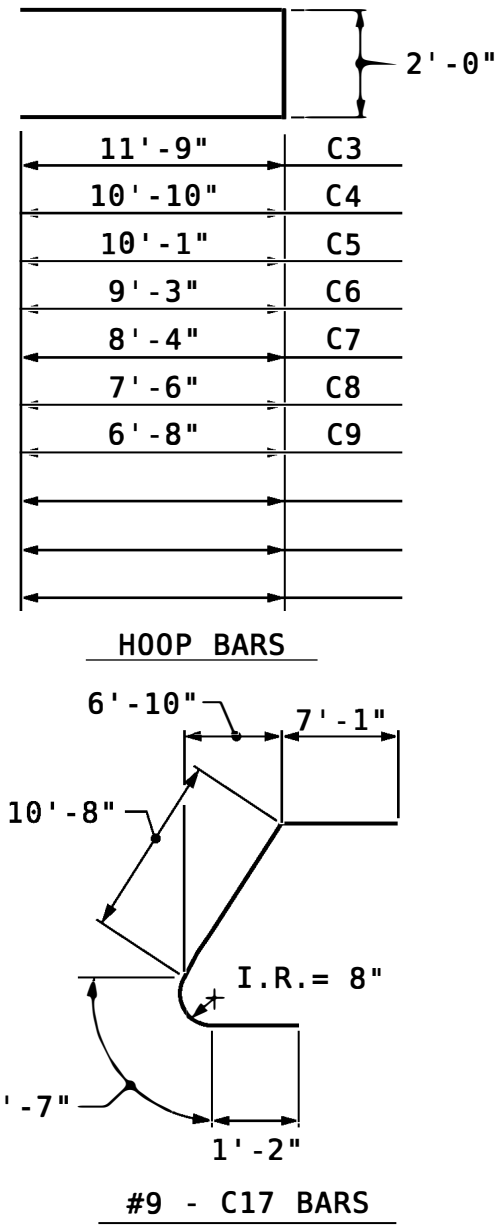


SIGN FOOTING MASONRY & REINFORCEMENT FOR
ITEM NO. 615.10001

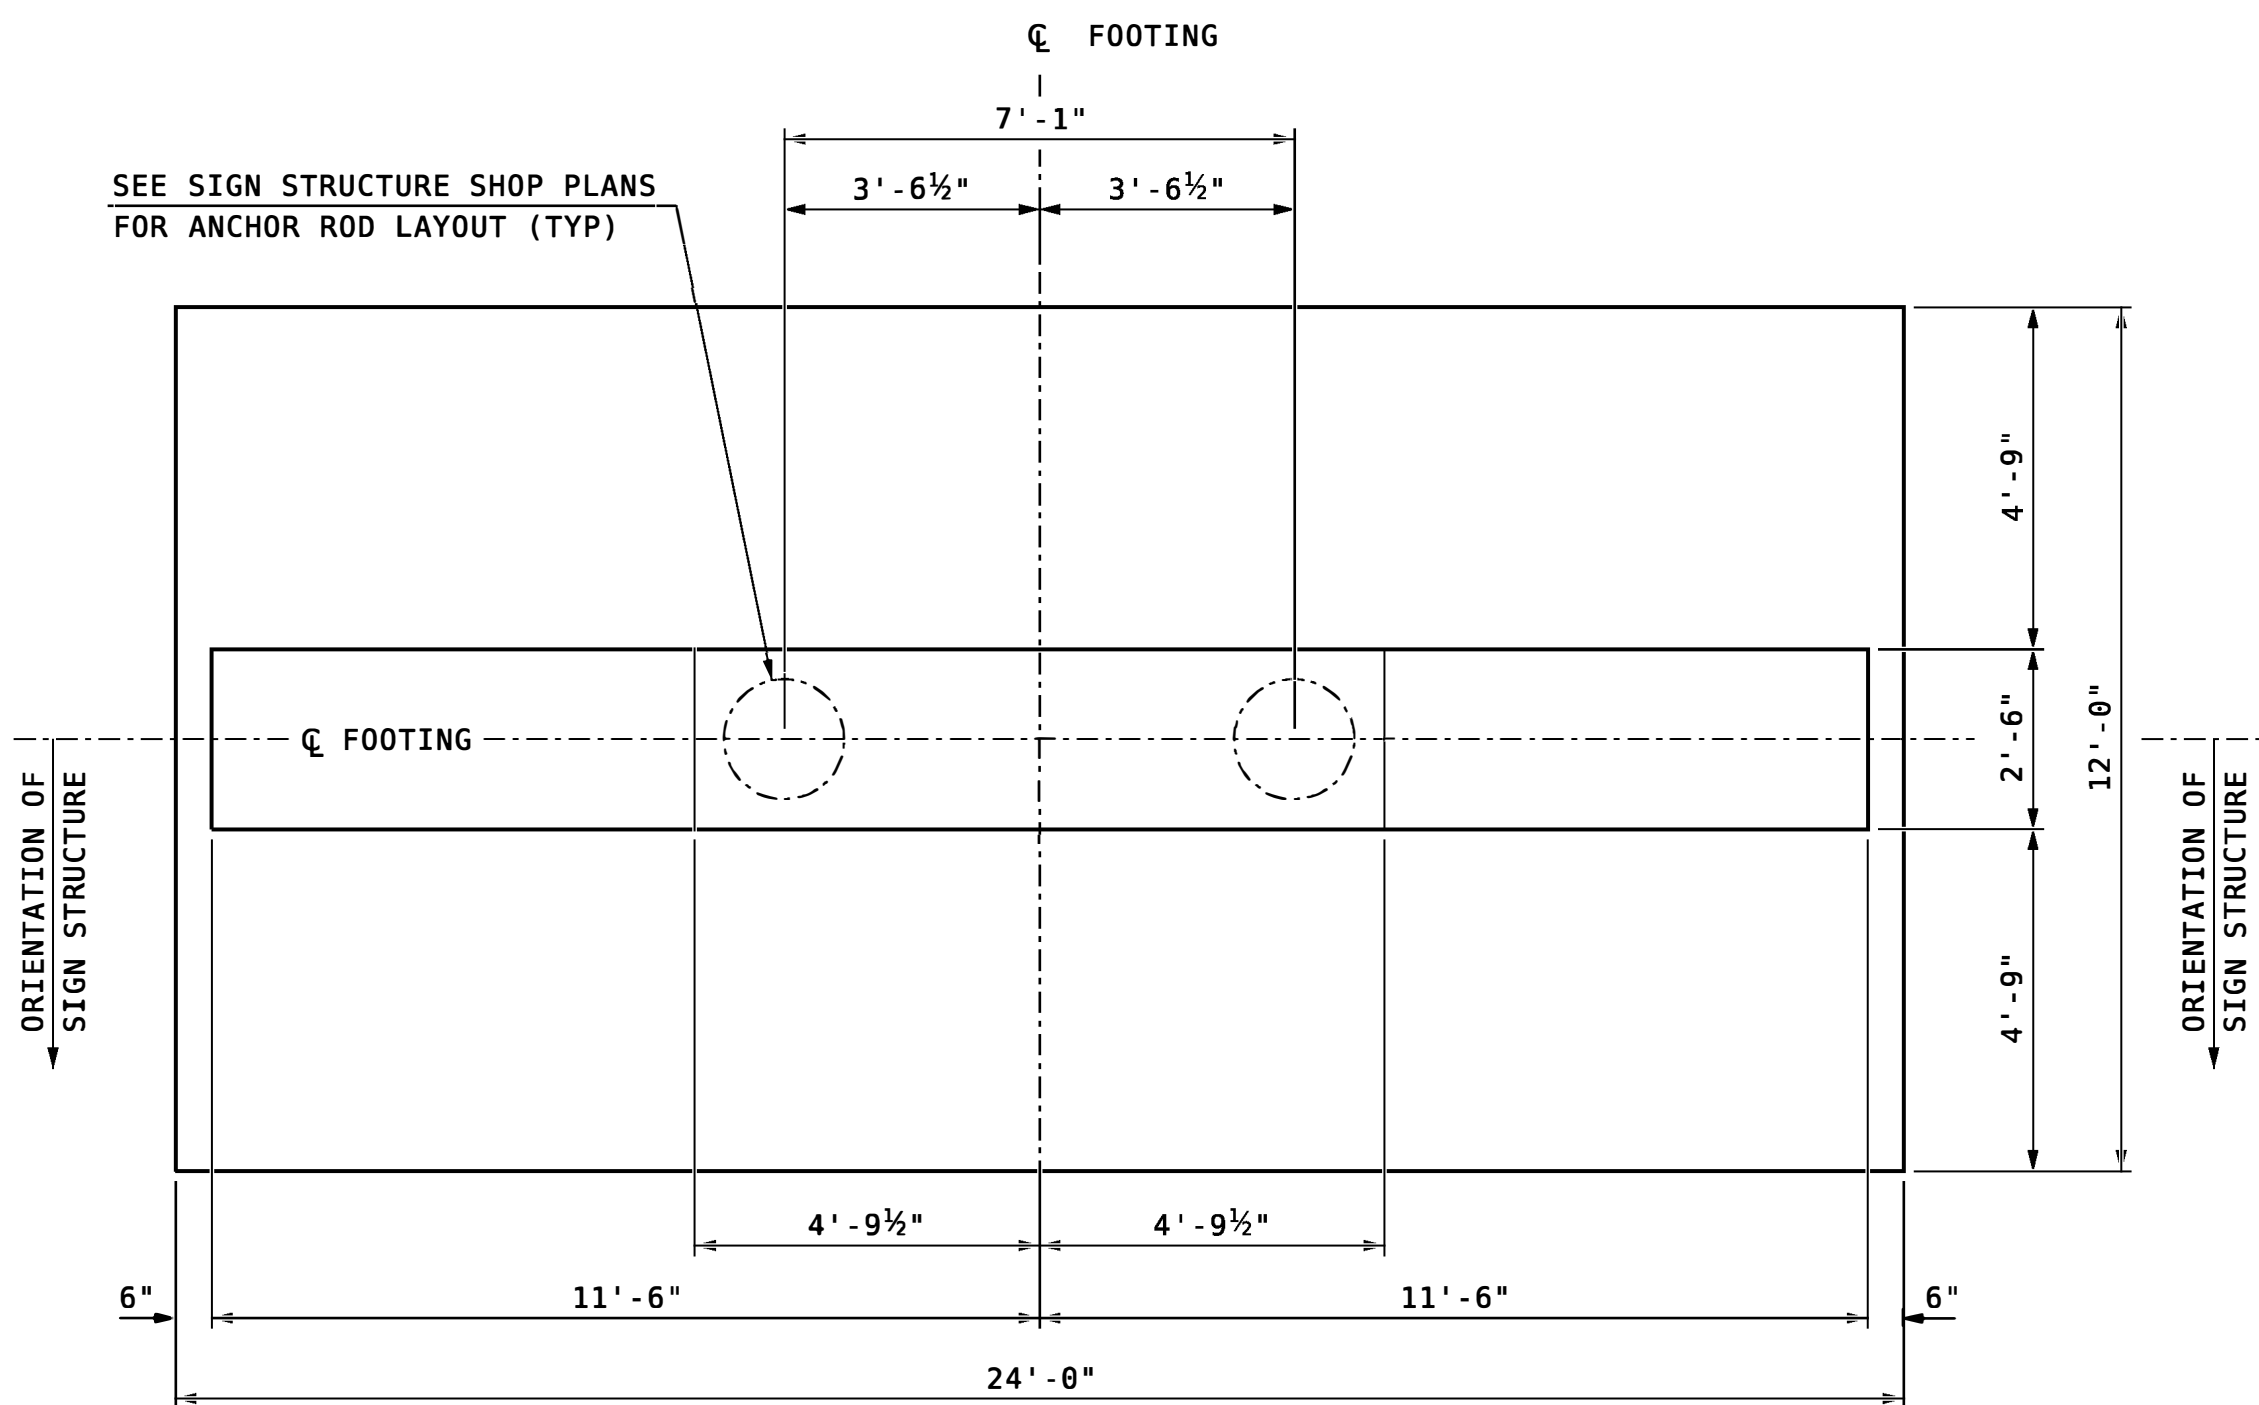

SIGN FOOTING MASONRY PLAN

SCALE: 3/8" = 1'-0"

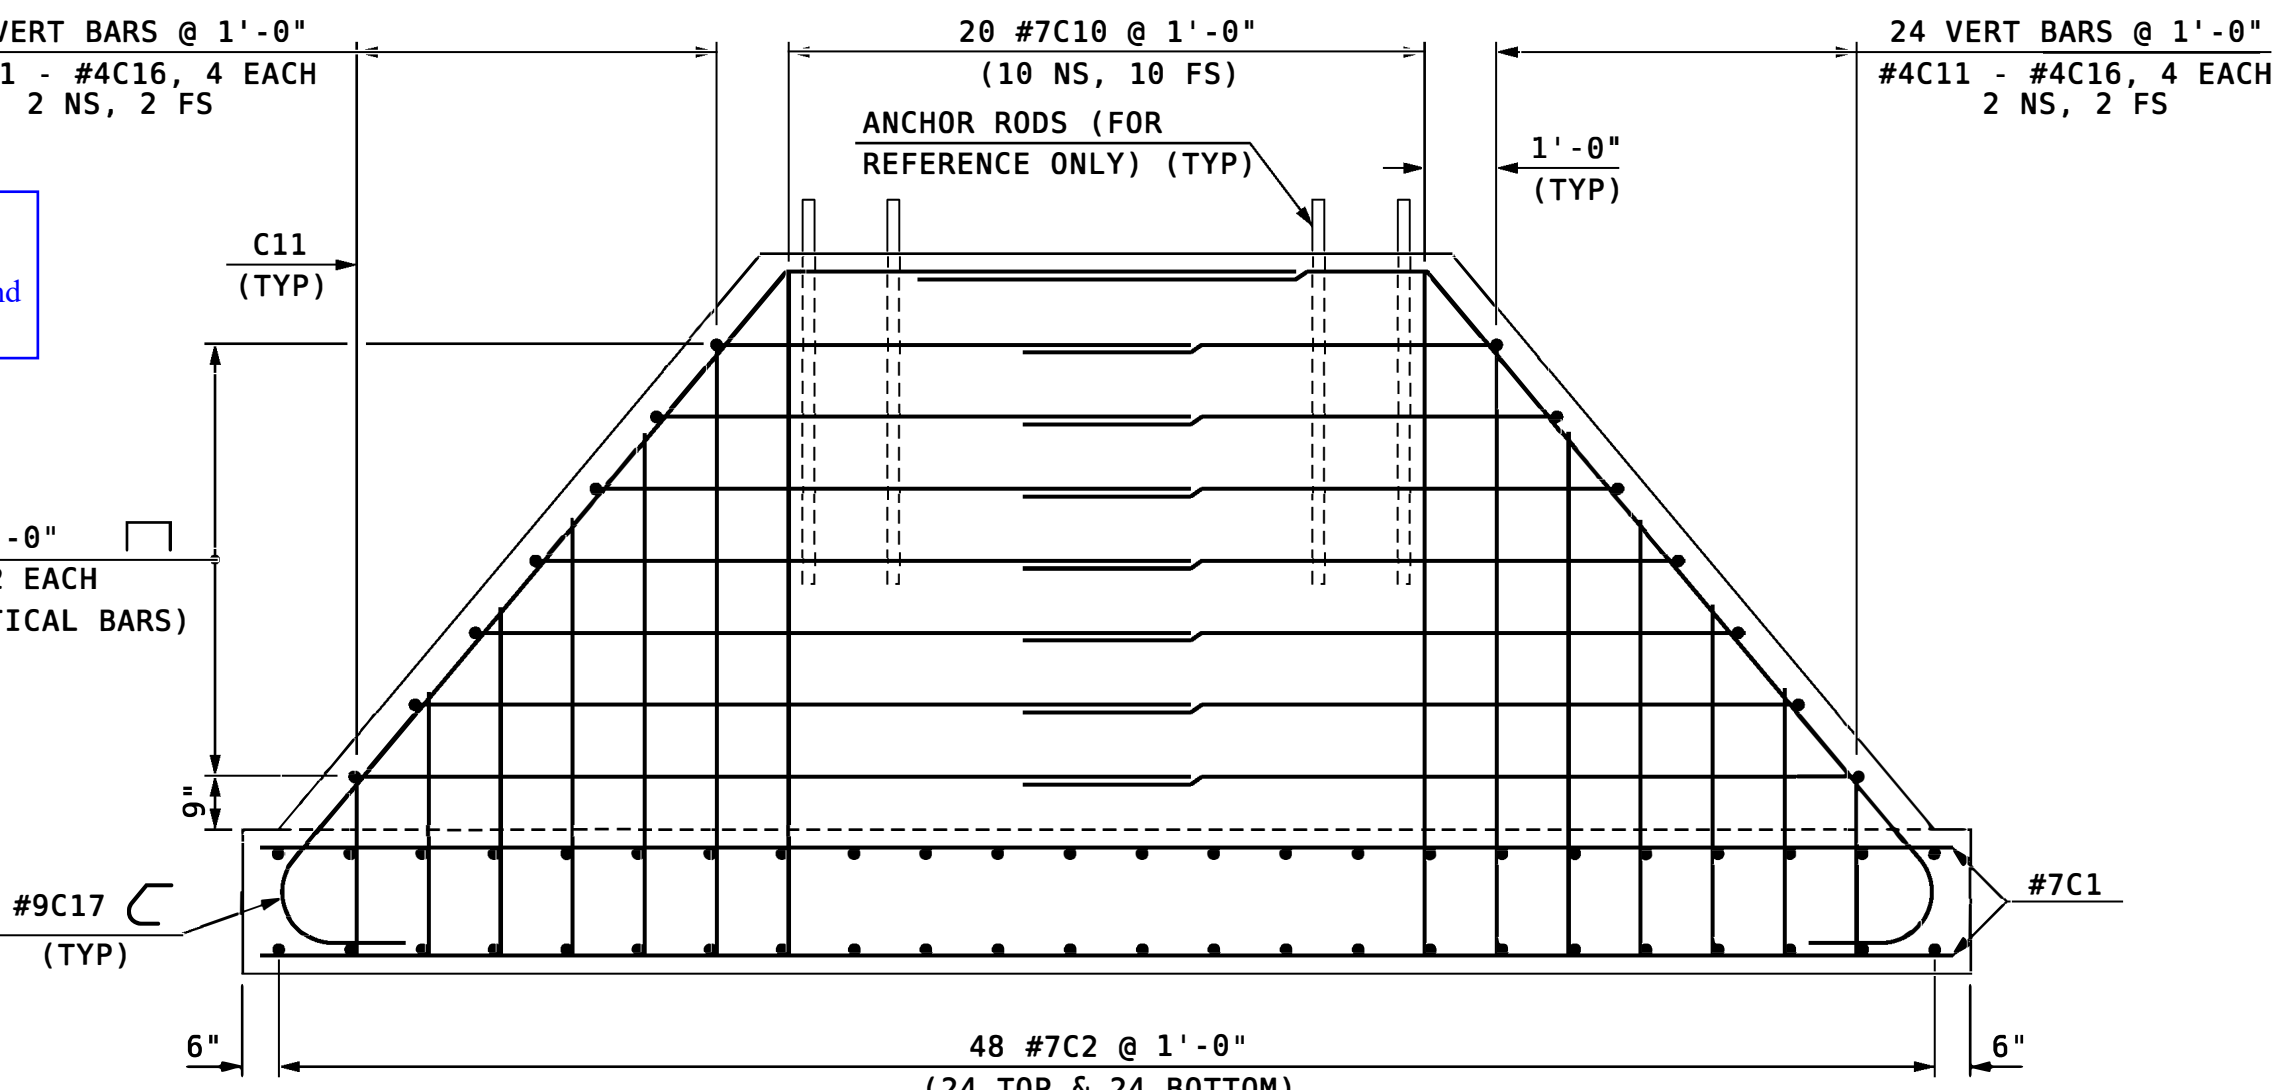

REINFORCING - SIDE ELEVATION

SCALE: 3/8" = 1'-0"

Quantify Item 209.1 for all projects


QUANTITY TABLE (2 FOOTINGS)

ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT
206.1	COMMON STRUCTURE EXCAVATION	85	CY
209.1	GRANULAR BACKFILL	170	CY
503.301	COFFERDAMS WITH SHEETING	2	U
508	STRUCTURAL FILL	37	CY
520.2	CONCRETE CLASS B	66.8	CY
544.1	REINFORCING STEEL (ROADWAY)	7012	LB


SIGN FOOTING ELEVATION TABLE

STATION	OFFSET	ELEV "A"	ELEV "B"
172+00	LT 80	261	251
172+00	RT 80	258	248

To be included and installed on all foundations (even without wires) to help prevent debris covering anchors

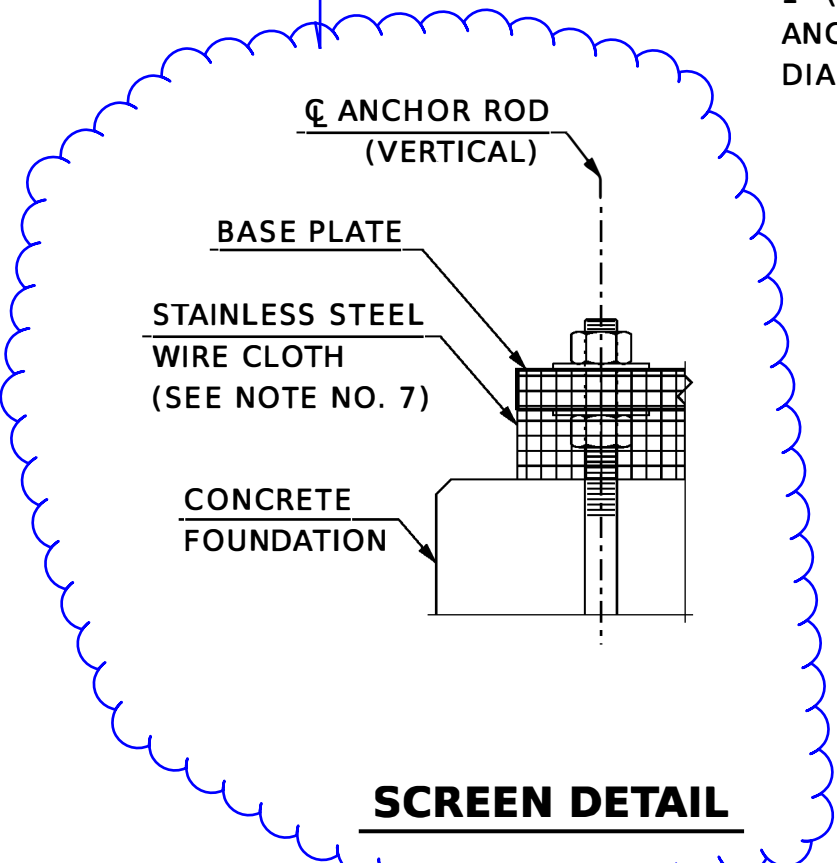

SCREEN DETAIL

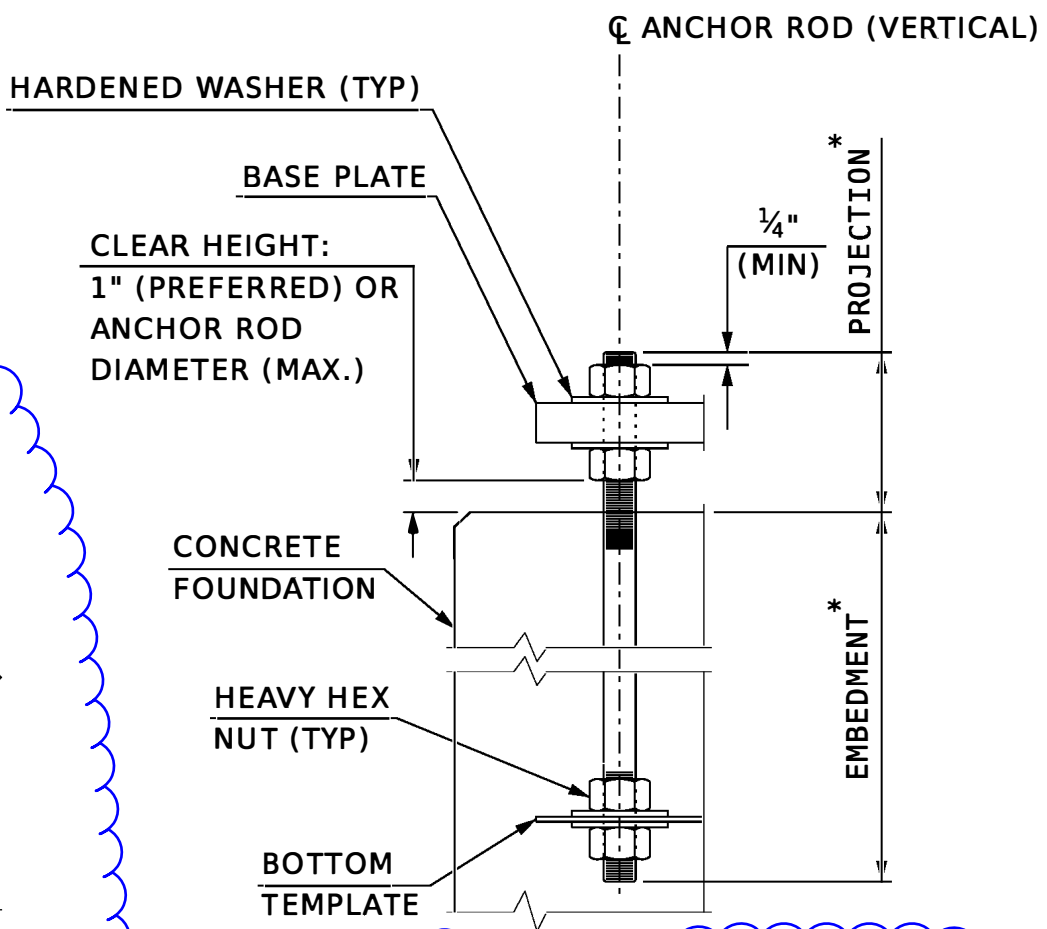


* SEE SIGN STRUCTURE SHOP PLANS

ANCHOR ROD DETAIL

Add note

FOR REFERENCE ONLY. SEE SIGN STRUCTURE SHOP PLANS FOR ANCHOR ROD LAYOUT (TO BE SUPPLIED BY THE MANUFACTURER)

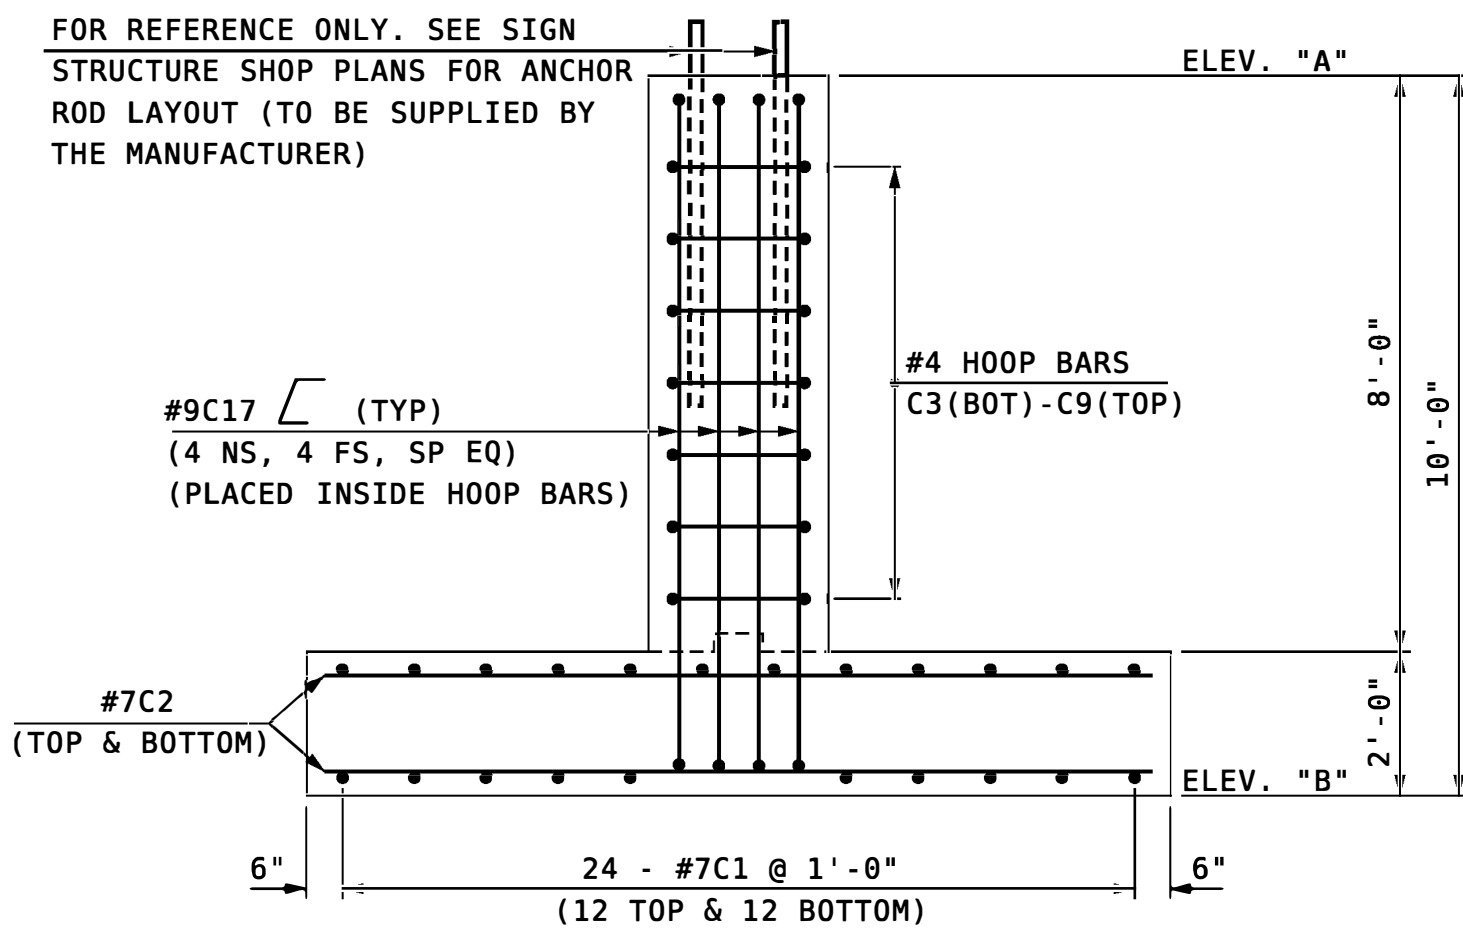

REINFORCING - END ELEVATION

SCALE: 3/8" = 1'-0"

Note the specific location of foundation obtained from Bureau of Traffic

SAMPLE PLAN


DATE: 12/2024

Note the inventory number of the structure/foundation obtained from Bureau of Traffic

INV #: 389-SPTPK-0015-NS20.9

SUBDIRECTORY	.DGN LOCATOR	SHEET SCALE
ROCHESTER/10620L	615.1000X	AS NOTED

STATE OF NEW HAMPSHIRE DEPARTMENT OF TRANSPORTATION * BUREAU OF BRIDGE DESIGN									
TOWN	ROCHESTER	BRIDGE NO.	N/A	STATE PROJECT	10620L	BRIDGE SHEET			
LOCATION	NH ROUTE 16 - 400' SOUTH OF EXIT 15 NB OFF RAMP	OVERHEAD SIGN STRUCTURE FOOTING				OF			
REVISIONS AFTER PROPOSAL		BY		DATE		BY		DATE	
		DESIGNED				CHECKED			
		DRAWN				CHECKED			
		QUANTITIES				CHECKED			
		ISSUE DATE		FEDERAL PROJECT NO.		SHEET NO.		TOTAL SHEETS	
		REV. DATE							

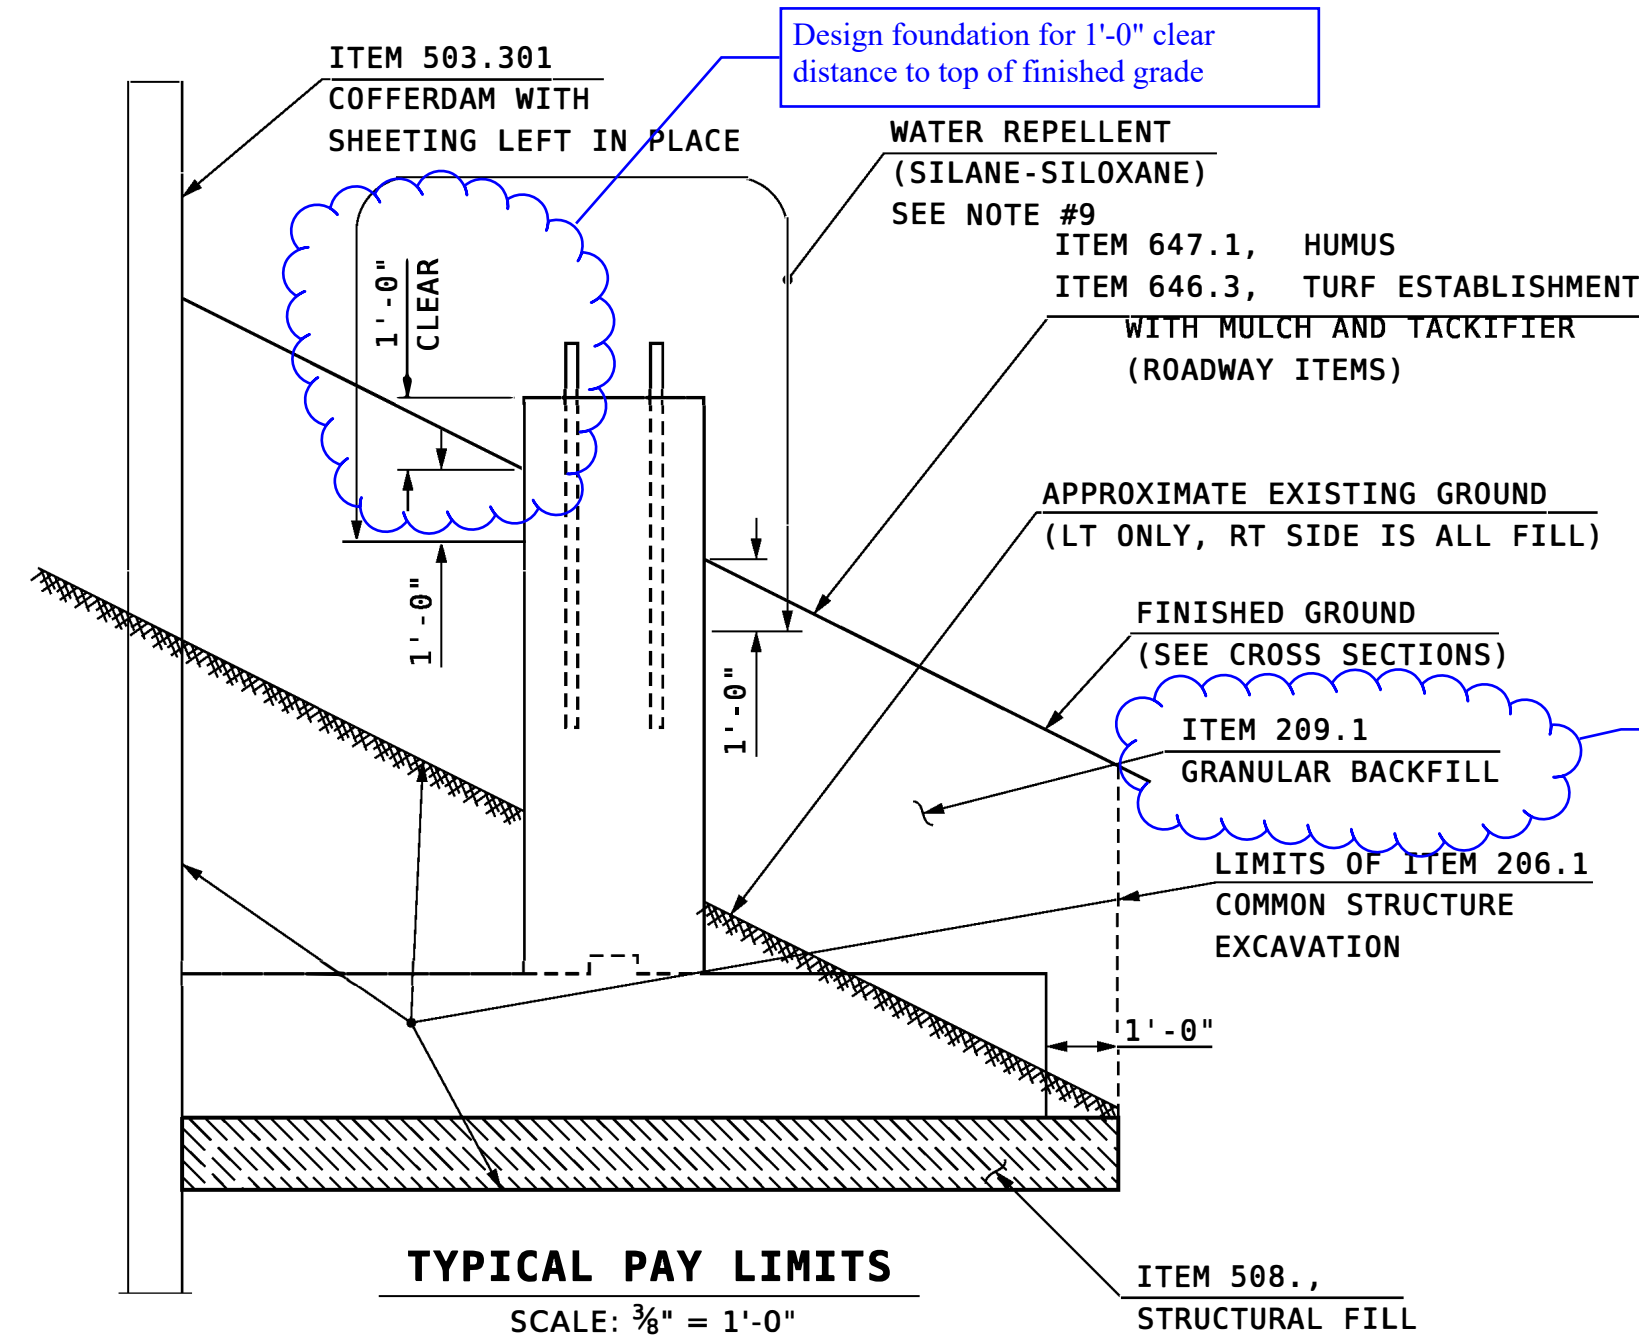

SIGN FOOTING NOTES


- FOR THE INSTALLATION AND PRETENSIONING OF ANCHOR RODS, SEE SPECIAL PROVISION AMENDMENT TO SECTION 615, TRAFFIC SIGNS.
- THERE ARE 2 FOOTINGS OF THIS CONFIGURATION REQUIRED AND THE QUANTITIES GIVEN ARE TOTALED FOR BOTH FOOTINGS.
- ALL REINFORCING STEEL SHALL HAVE 3" MINIMUM CLEAR COVER FROM CONCRETE SURFACES.
- FOOTINGS SHALL BE BACKFILLED TO FINAL GROUND BEFORE THE SIGN SUPPORT STRUCTURE IS INSTALLED.
- FINAL GROUND ELEVATIONS SHALL BE TAKEN FROM THE ROADWAY CROSS SECTIONS. IF ACTUAL FINAL ELEVATIONS DIFFER BY MORE THAN 1'-0", THEN A COMPLETE REDESIGN OF THE SIGN FOOTING WILL BE REQUIRED.
- THE LEFT FOOTING DESIGN SIGN AREA IS 442.4 SF. THE RIGHT FOOTING DESIGN SIGN AREA IS 504.0 SF. BOTH DESIGN SIGN AREAS INCLUDED A 30% INCREASE.
- STAINLESS STEEL STD. GR. WIRE CLOTH, 1/4" MAX. OPENING WITH MIN. WIRE DIA. OF AWG NO. 16 WITH 2" LAP. SECURE WITH 3/4" STAINLESS STEEL BANDING AFTER ANCHOR RODS ARE FULLY TIGHTENED AND TESTED. (SUBSIDIARY TO ITEM 615.XX)
- FOOTING SUPPORTED ON STRUCTURAL FILL ON UNDISTURBED SOIL WITH A NOMINAL BEARING CAPACITY OF 15.1 KSF IN COMBINATION WITH A RESISTANCE FACTOR OF 0.45 (STRENGTH). SEE THE GEOTECHNICAL REPORT FOR FURTHER INFORMATION.
- WATER REPELLENT (SILANE-SILOXANE) SHALL BE APPLIED TO ALL EXPOSED CONCRETE SURFACES TO 1'-0" BELOW FILL LINES IN ACCORDANCE WITH SECTION 534. ALL COSTS SUBSIDIARY TO ITEM 520.2.
- NO GROUT SHALL BE PLACED BETWEEN THE FOUNDATION AND BOTTOM OF THE BASE PLATE.

SIGN FOOTING REINFORCING SCHEDULE


MARK	SIZE	NO.	UNBENT LENGTH	TYPE
C1	#7	48	23'-6"	STRAIGHT
C2	#7	96	11'-6"	STRAIGHT
C3	#4	4	25'-6"	HOOP
C4	#4	4	23'-8"	HOOP
C5	#4	4	22'-2"	HOOP
C6	#4	4	20'-6"	HOOP
C7	#4	4	18'-8"	HOOP
C8	#4	4	17'-0"	HOOP
C9	#4	4	15'-4"	HOOP
C10	#7	40	9'-6"	STRAIGHT
C11	#4	8	2'-6"	STRAIGHT
C12	#4	8	3'-8"	STRAIGHT
C13	#4	8	4'-10"	STRAIGHT
C14	#4	8	6'-1"	STRAIGHT
C15	#4	8	7'-3"	STRAIGHT
C16	#4	8	8'-6"	STRAIGHT
C17	#9	16	20'-6"	BENT & CURVED

REINFORCING STEEL IN SCHEDULE IS FOR 2 SIGN FOOTINGS. TOTAL WEIGHT OF REINFORCING STEEL IN TABLE IS 7012 lb.


REINFORCING STEEL SHALL BE GRADE 60

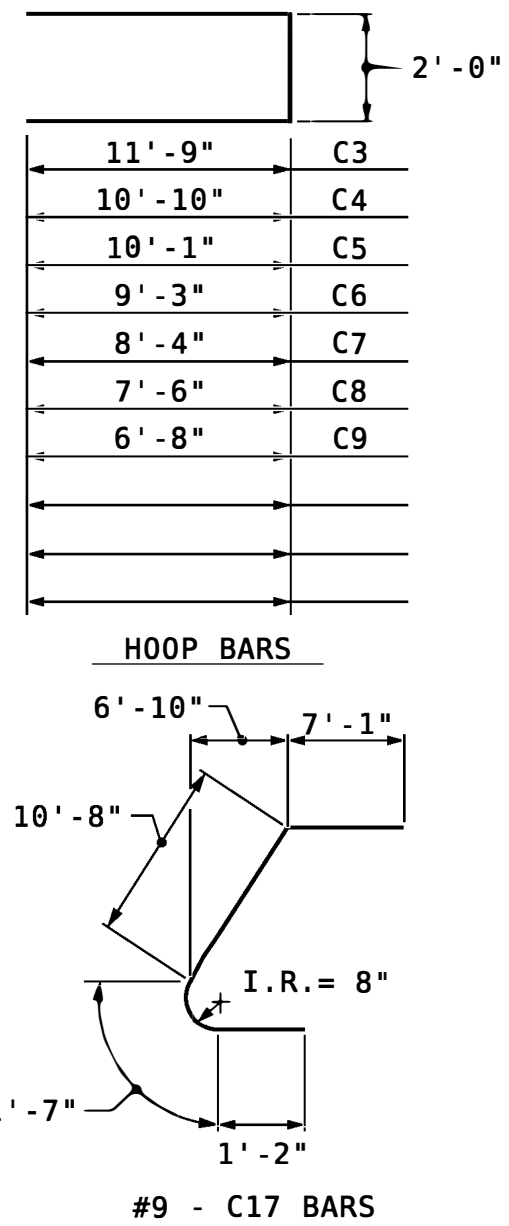

14 #4 HOOP BARS @ 1'-0"
C3(BOT) - C9(TOP), 2 EACH
(PLACED OUTSIDE VERTICAL BARS)

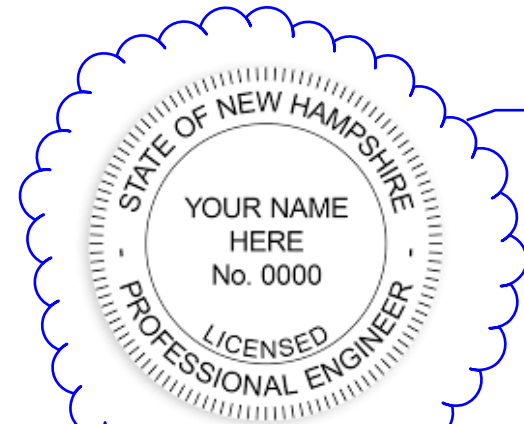


SIGN FOOTING MASONRY & REINFORCEMENT FOR
ITEM NO. 615.10001

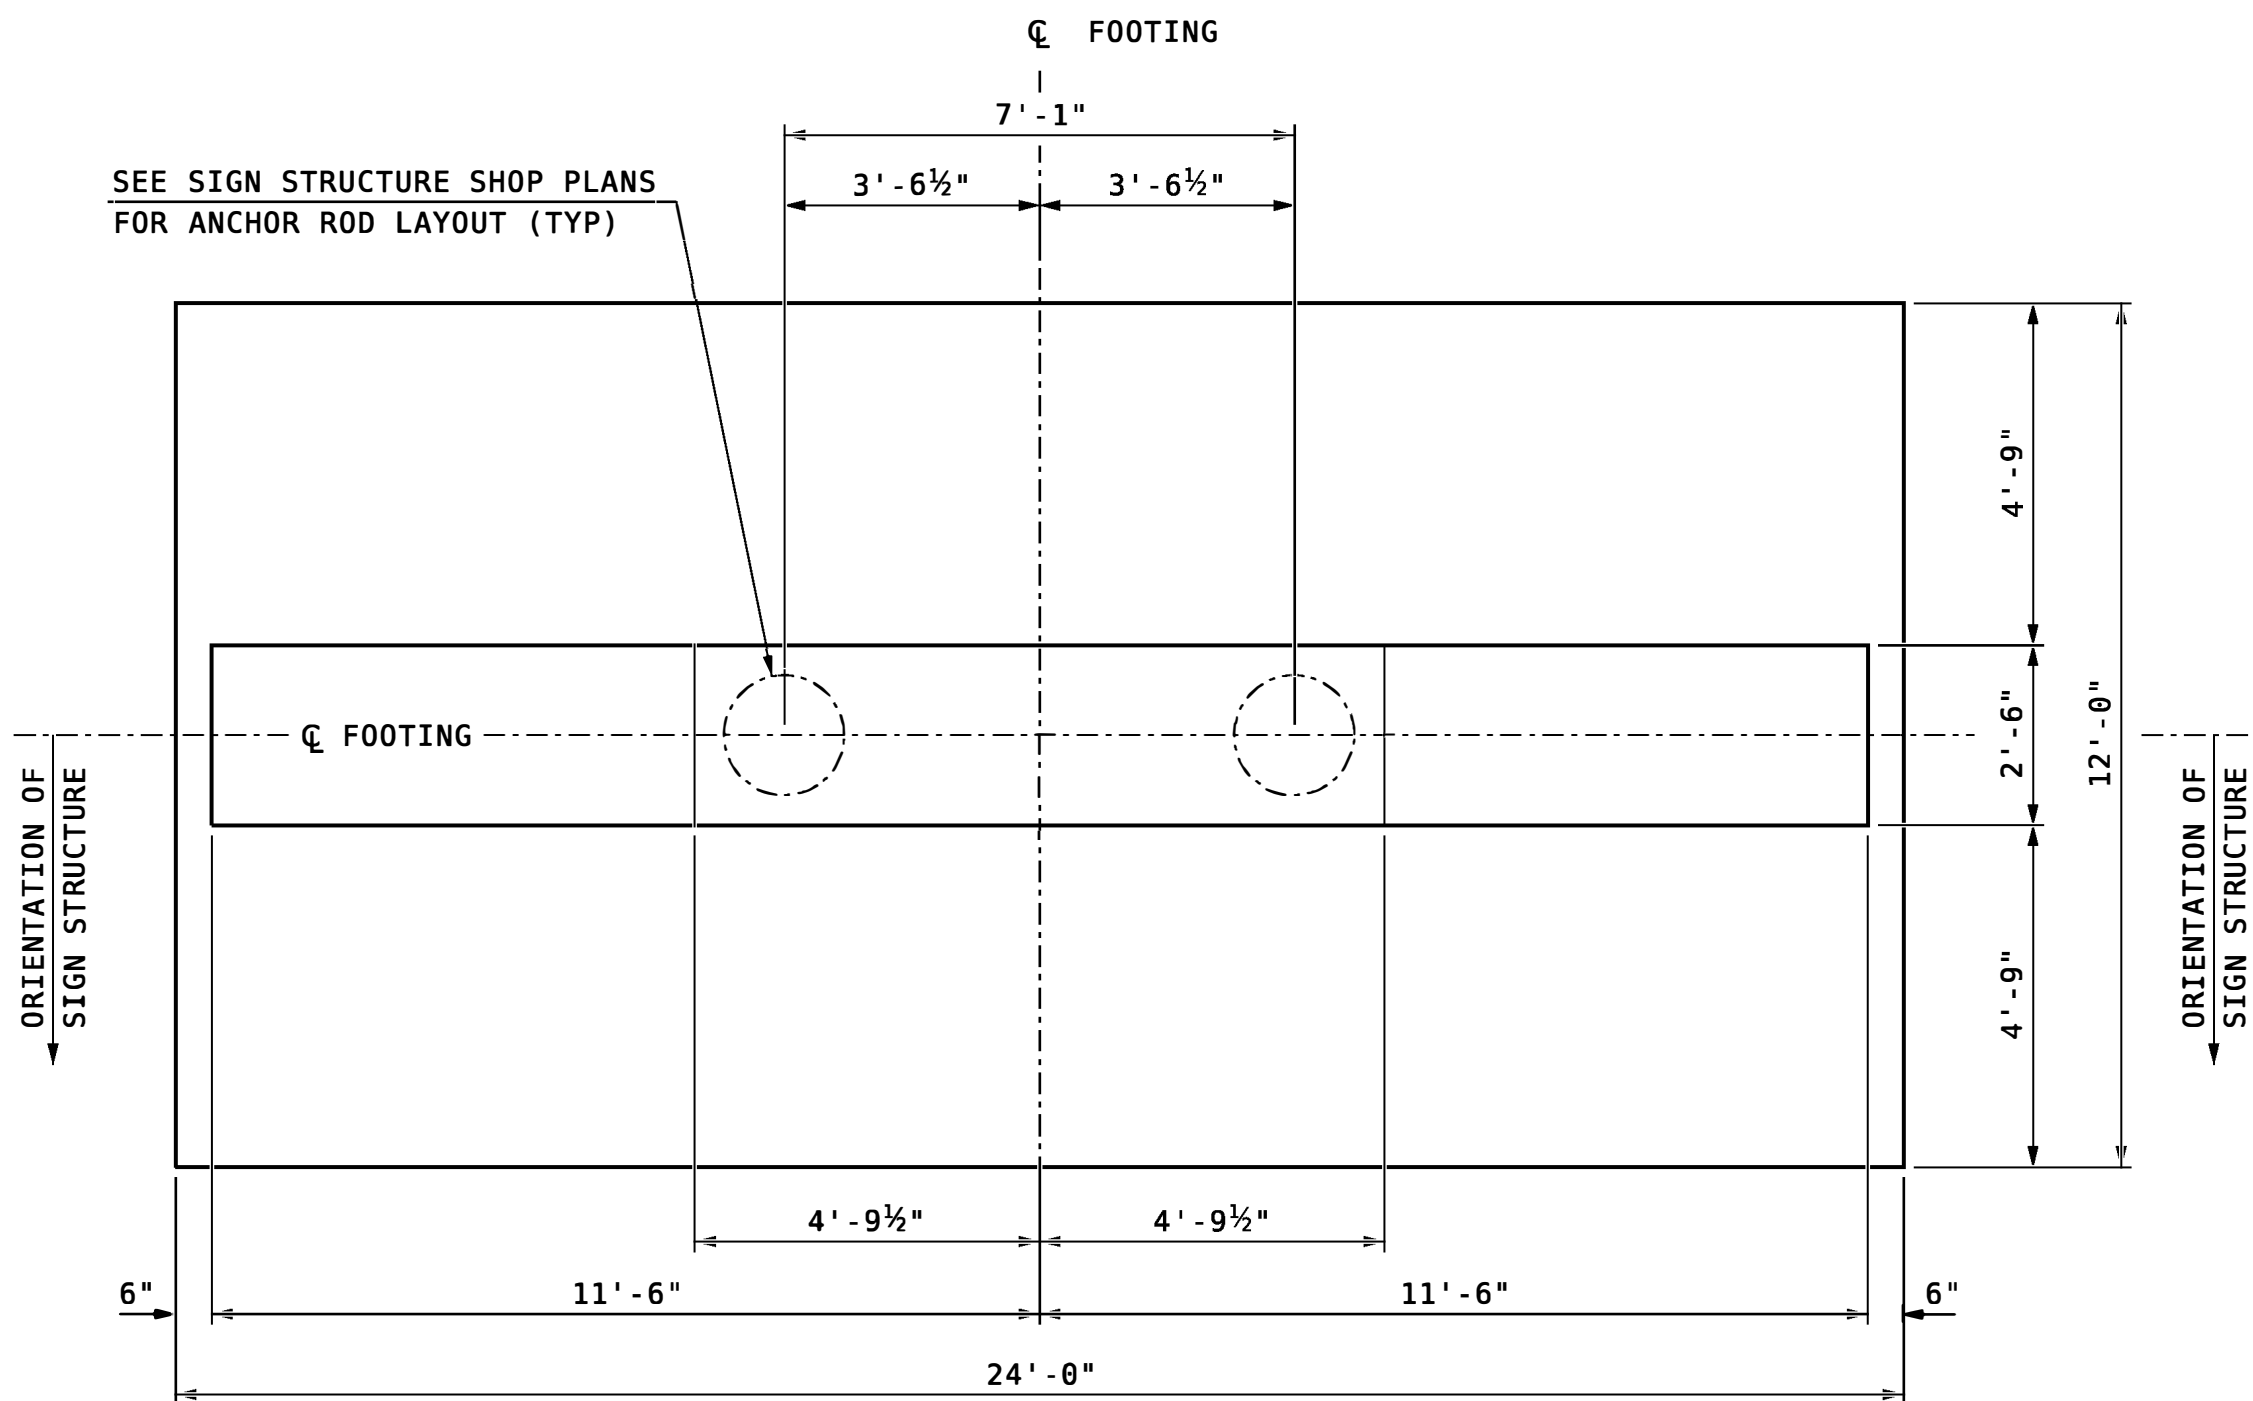

SIGN FOOTING MASONRY PLAN

SCALE: 3/8" = 1'-0"

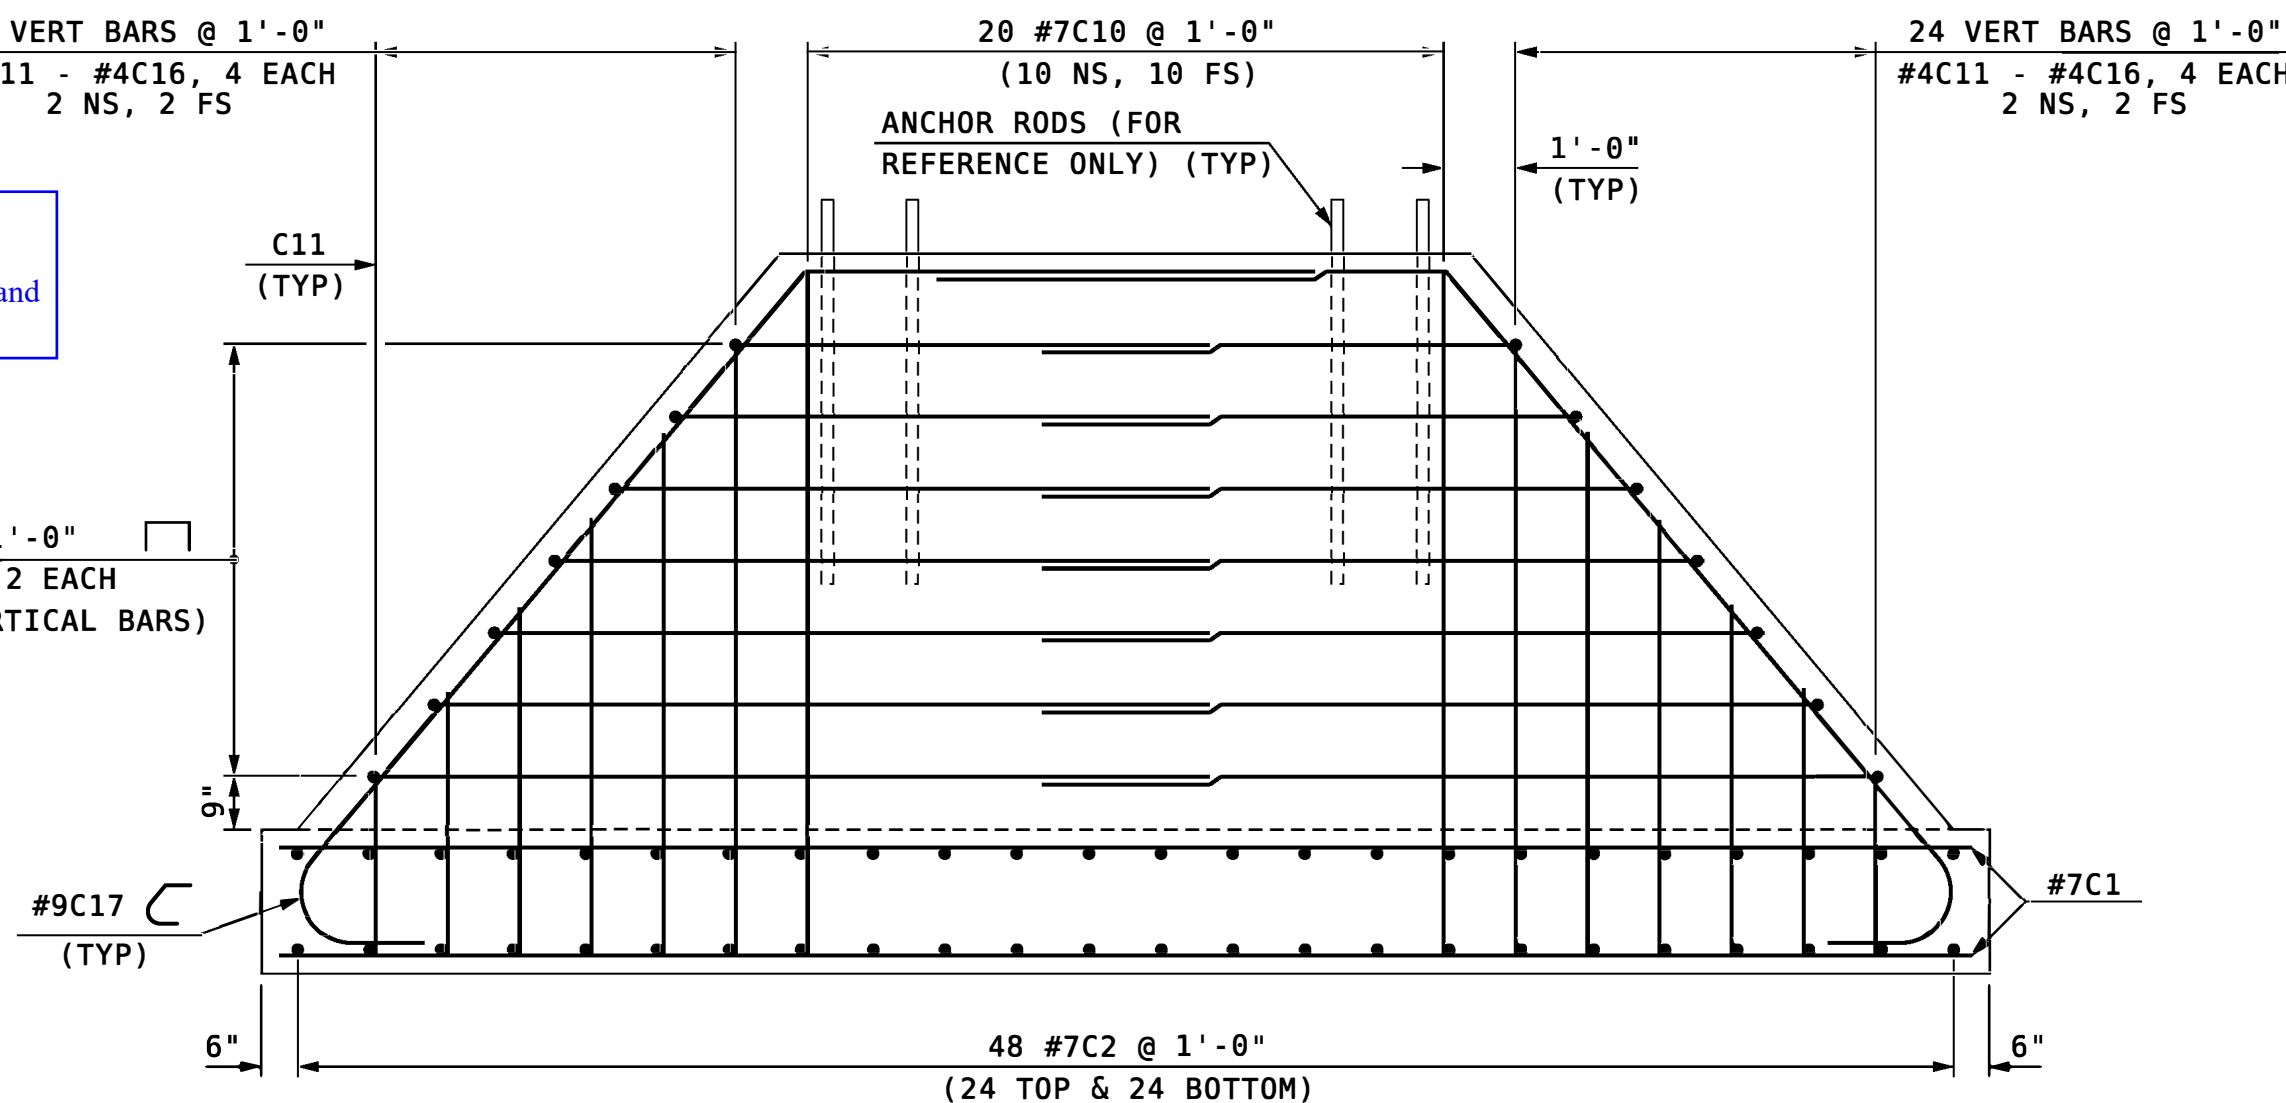

REINFORCING - SIDE ELEVATION

SCALE: 3/8" = 1'-0"

Quantify Item 209.1 for all projects


QUANTITY TABLE (2 FOOTINGS)

ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT
206.1	COMMON STRUCTURE EXCAVATION	85	CY
209.1	GRANULAR BACKFILL	170	CY
503.301	COFFERDAMS WITH SHEETING	2	U
508	STRUCTURAL FILL	37	CY
520.2	CONCRETE CLASS B	66.8	CY
544.1	REINFORCING STEEL (ROADWAY)	7012	LB

SIGN FOOTING ELEVATION TABLE


STATION	OFFSET	ELEV "A"	ELEV "B"
172+00	LT 80	261	251
172+00	RT 80	258	248

To be included and installed on all foundations (even without wires) to help prevent debris covering anchors

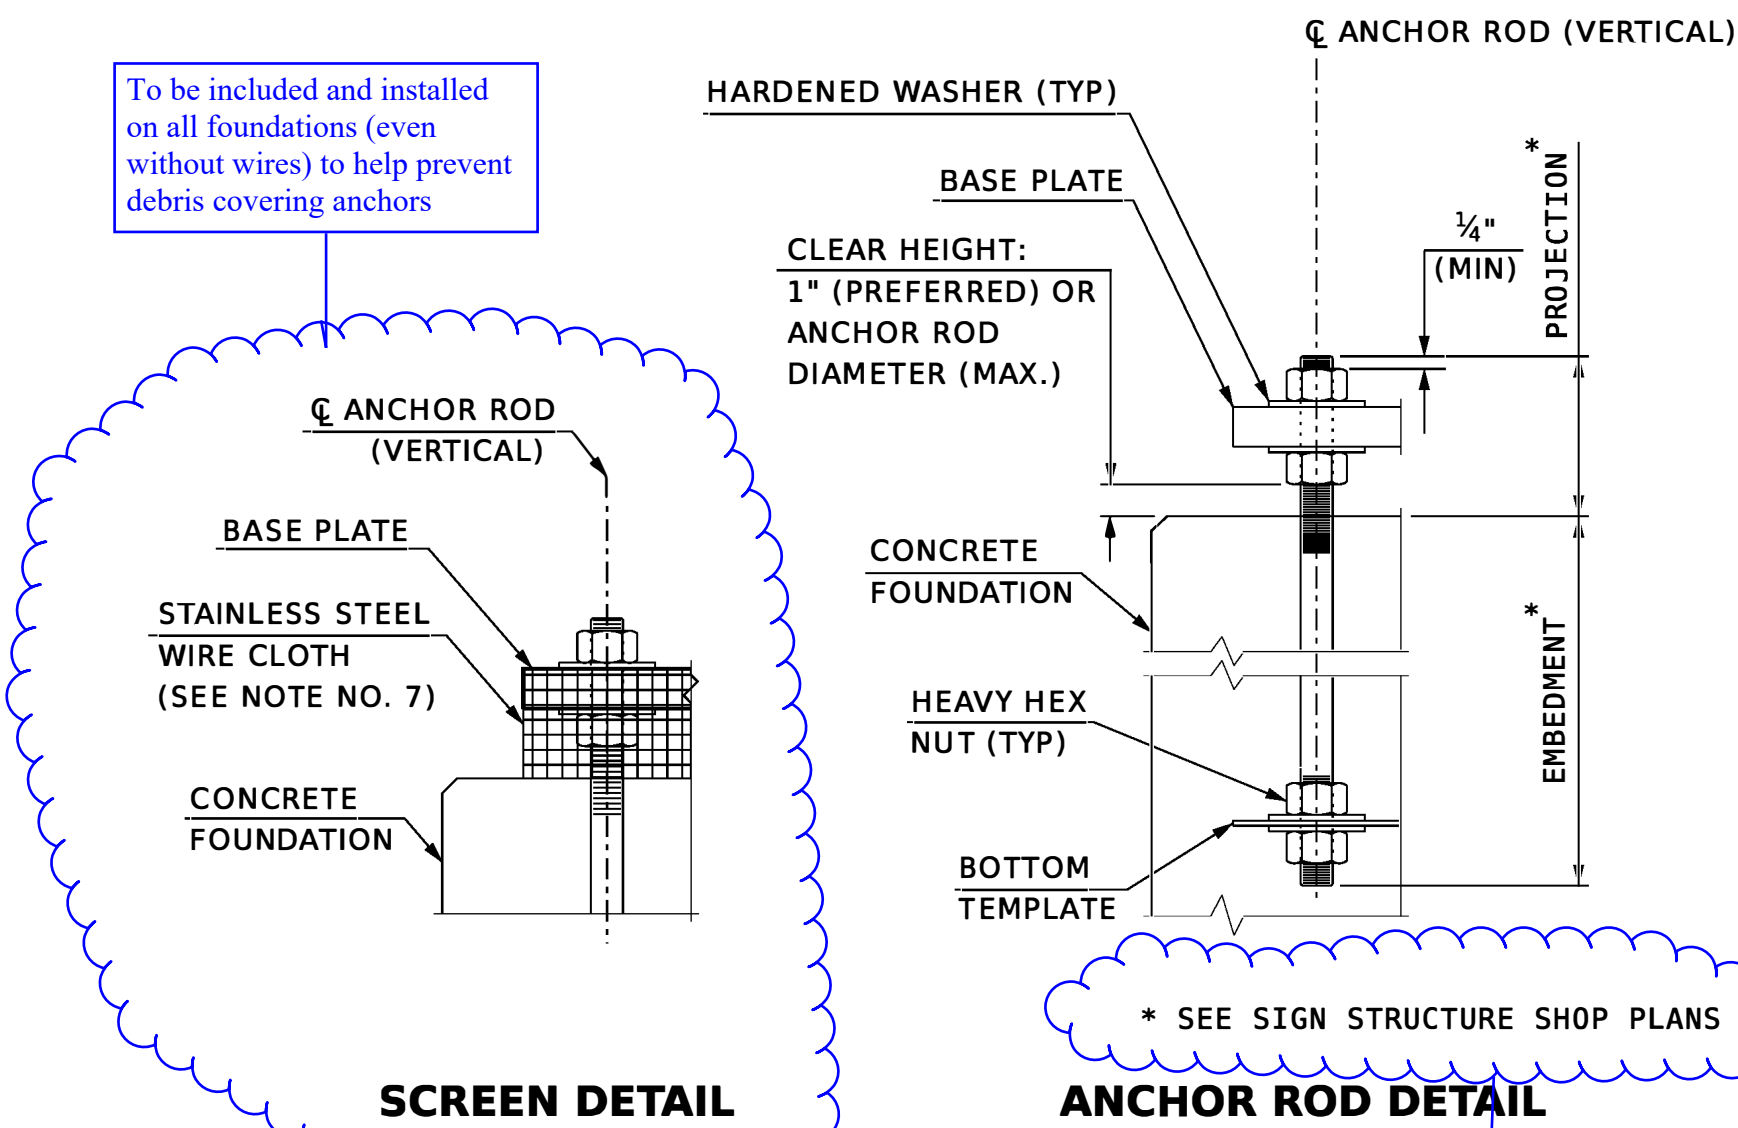

Add note

FOR REFERENCE ONLY. SEE SIGN STRUCTURE SHOP PLANS FOR ANCHOR ROD LAYOUT (TO BE SUPPLIED BY THE MANUFACTURER)

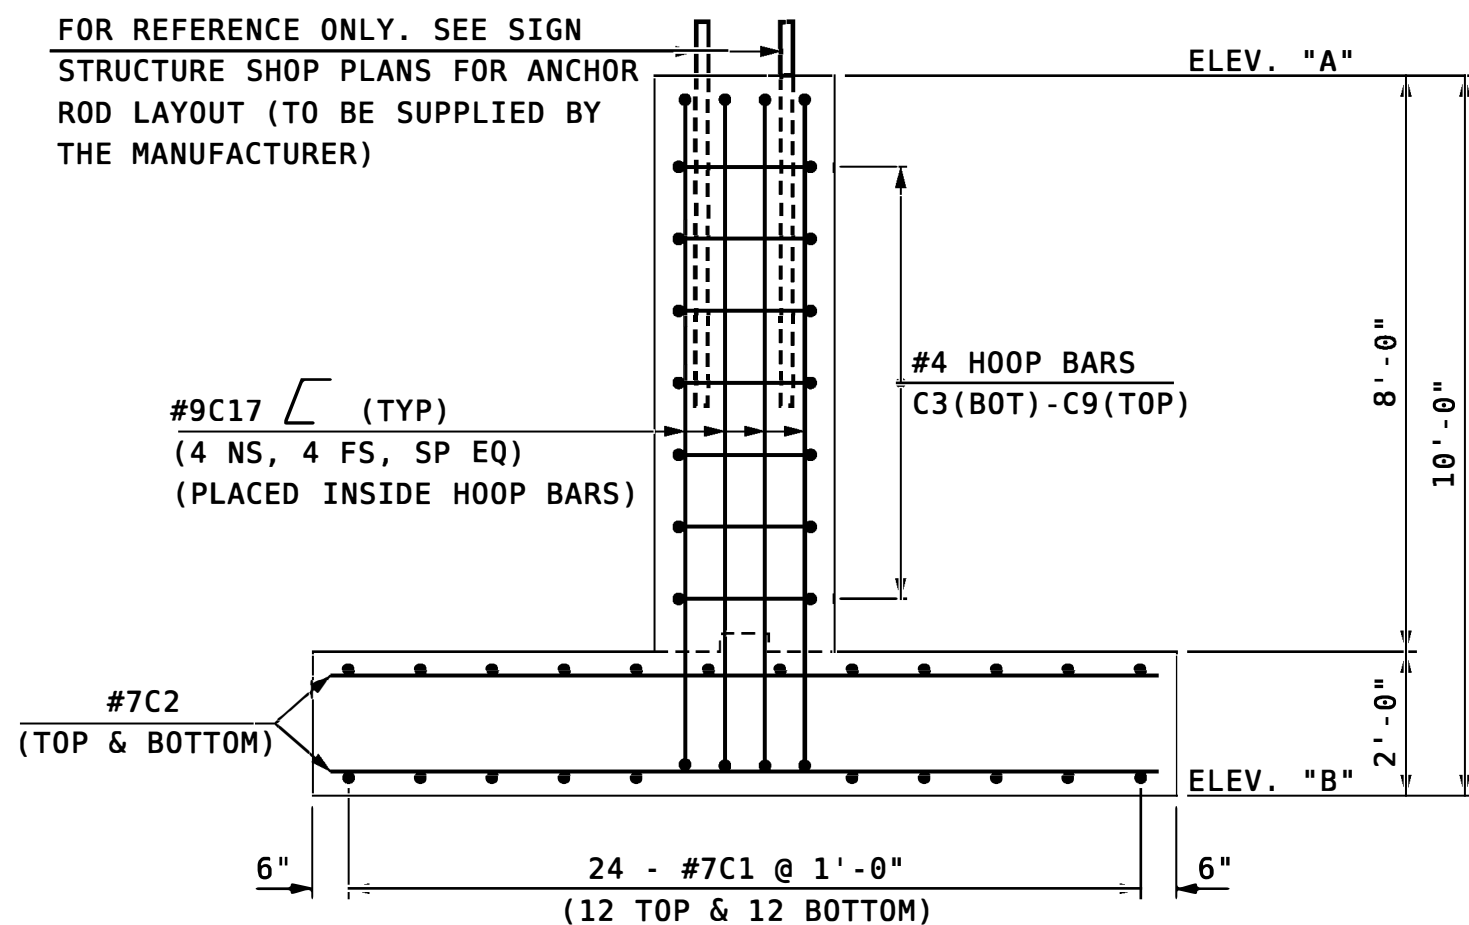

REINFORCING - END ELEVATION

SCALE: 3/8" = 1'-0"

Note the specific location of foundation obtained from Bureau of Traffic

SAMPLE PLAN

DATE: 12/2024

INV #: 389-SPTPK-0015-NS20.9

SUBDIRECTORY	.DGN LOCATOR	SHEET SCALE
ROCHESTER/10620L	615.1000X	AS NOTED

STATE OF NEW HAMPSHIRE DEPARTMENT OF TRANSPORTATION * BUREAU OF BRIDGE DESIGN									
TOWN	ROCHESTER	BRIDGE NO.	N/A	STATE PROJECT	10620L	BRIDGE SHEET			
LOCATION	NH ROUTE 16 - 400' SOUTH OF EXIT 15 NB OFF RAMP	OVERHEAD SIGN STRUCTURE FOOTING				OF			
REVISIONS AFTER PROPOSAL		DESIGNED		BY		DATE		FILE NUMBER	
		DRAWN							
		QUANTITIES							
		ISSUE DATE		FEDERAL PROJECT NO.		SHEET NO.		TOTAL SHEETS	
		REV. DATE							